

Industrial Ethernet

PoE Capability, High-performance Industrial Automation and IIoT Solution




Total Industrial Networking Solution

PLANET Industrial Networking solution based on Industrial Ethernet, Industrial Automation and IIoT is highly-reliable and secure to ensure continuous operation in harsh environments such as factories, outdoors, and places where extreme temperatures are experienced. With industrial-grade certifications such as RoHS, CE, FCC, EN50155 and E-Mark, PLANET provides a complete product portfolio for a variety of Industrial Applications such as factory automation, intelligent transportation system and more.

Highway

Meeting EN50155 and E-Mark standards to withstand vibration, shock, etc.

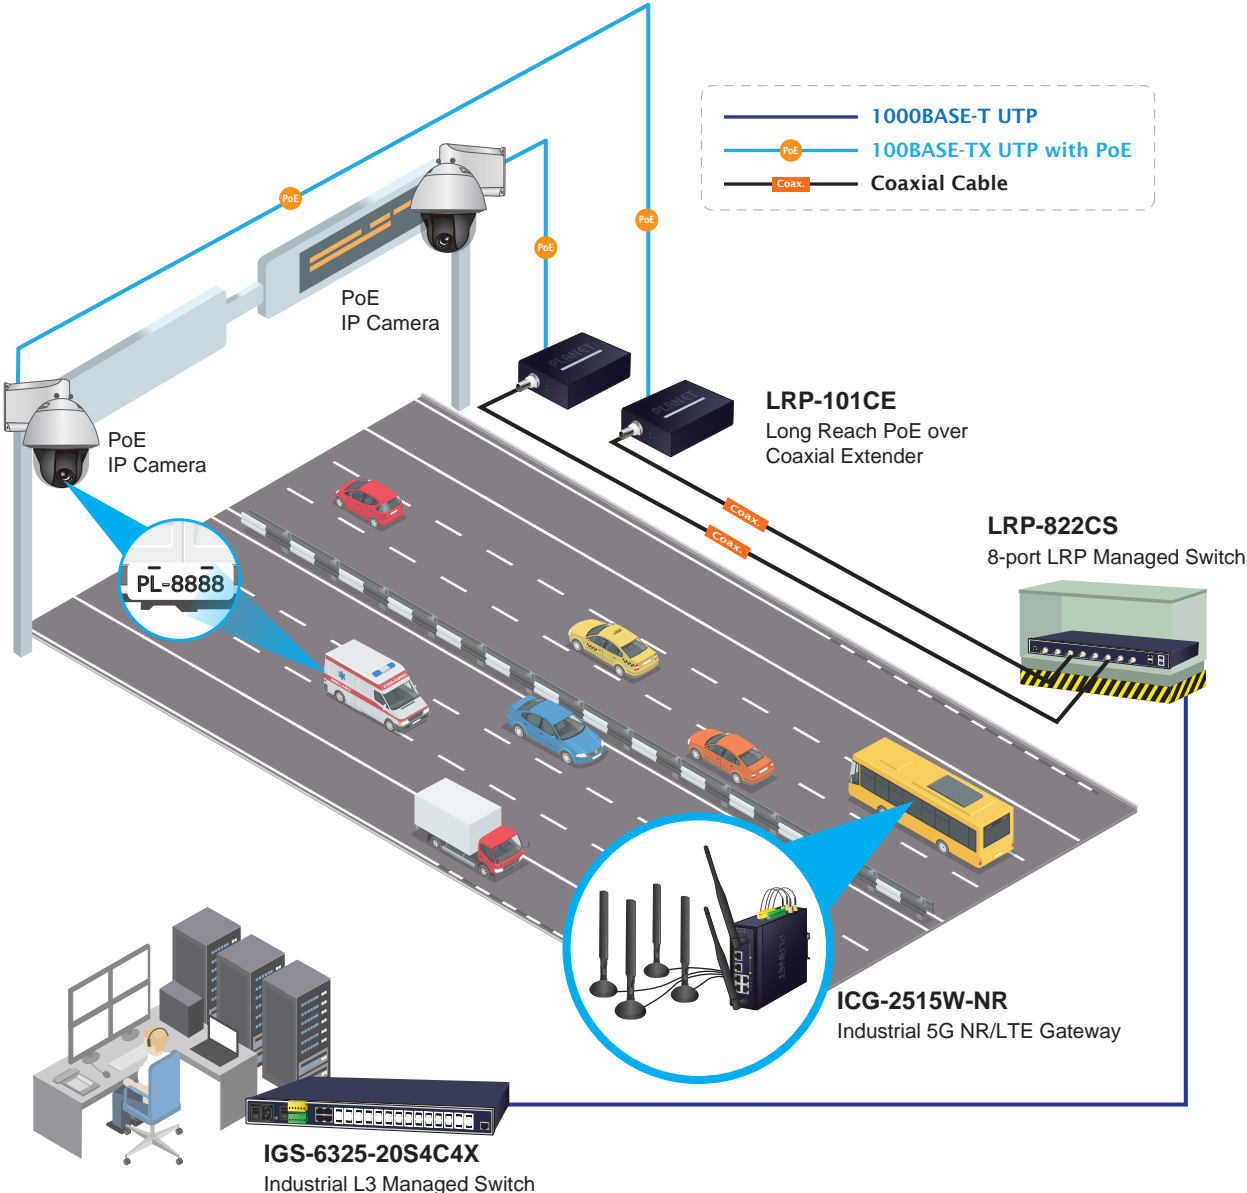


Railway Transmission System




EN50155 certified equipment to ensure transmission quality



On the Train

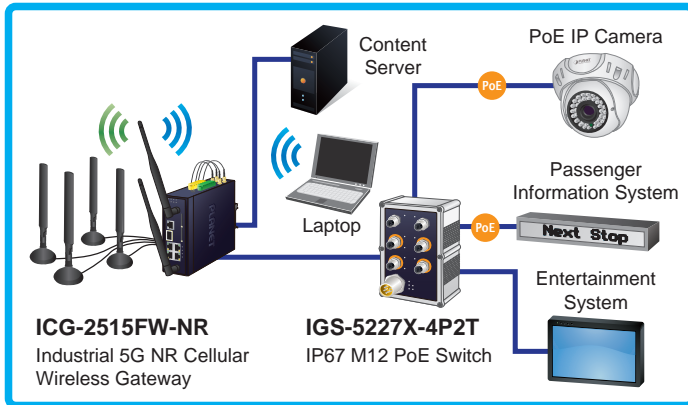



On the Platform

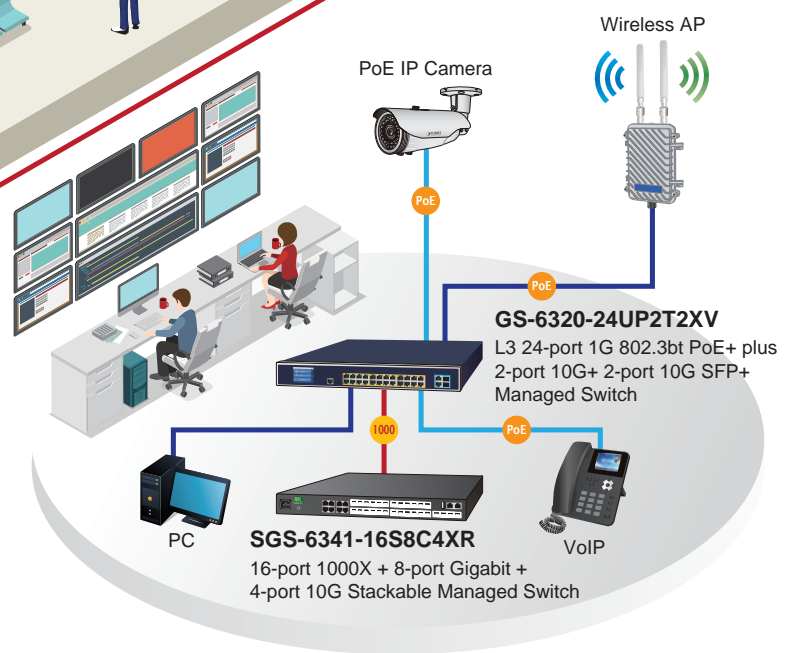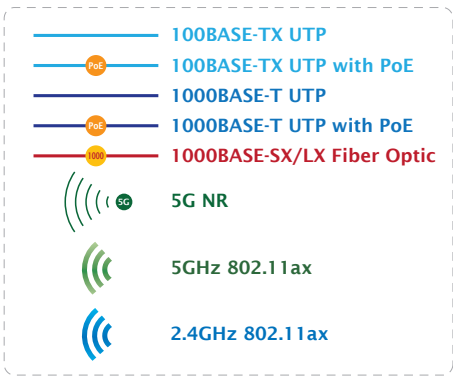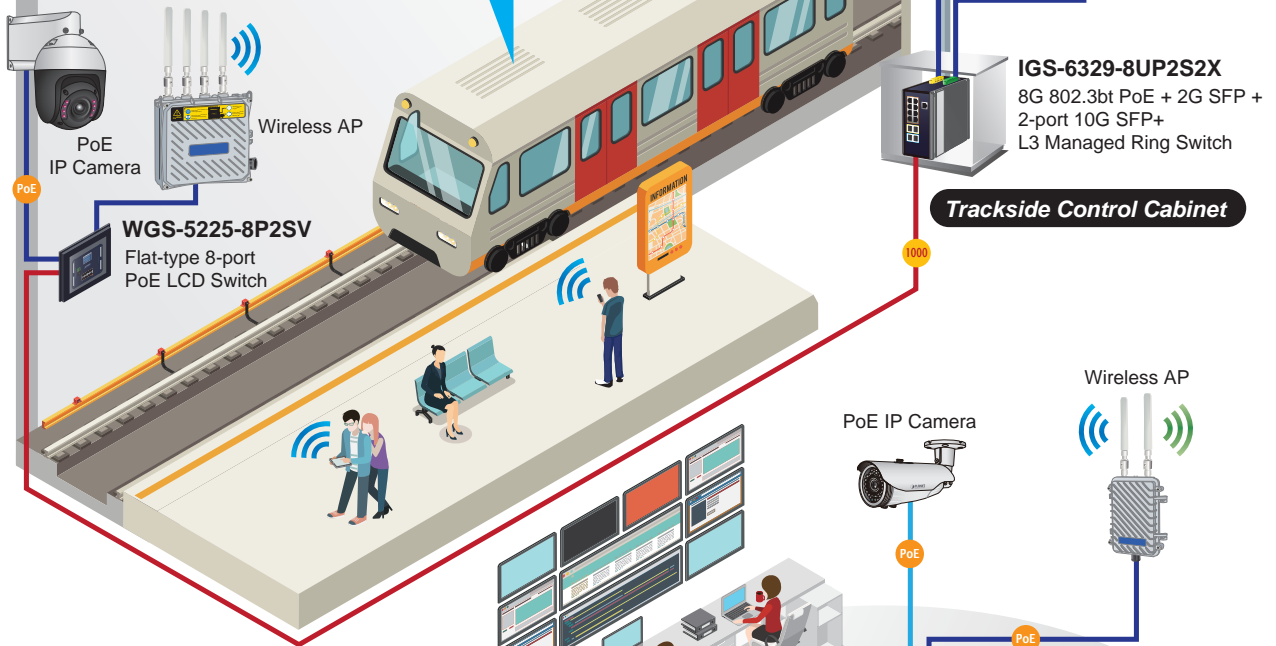

Remote Control Center



In-Vehicle Networking

4G/LTE/GPS connectivity brings security, communications and service management in a moving vehicle.

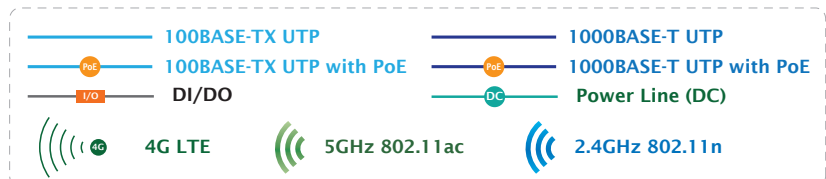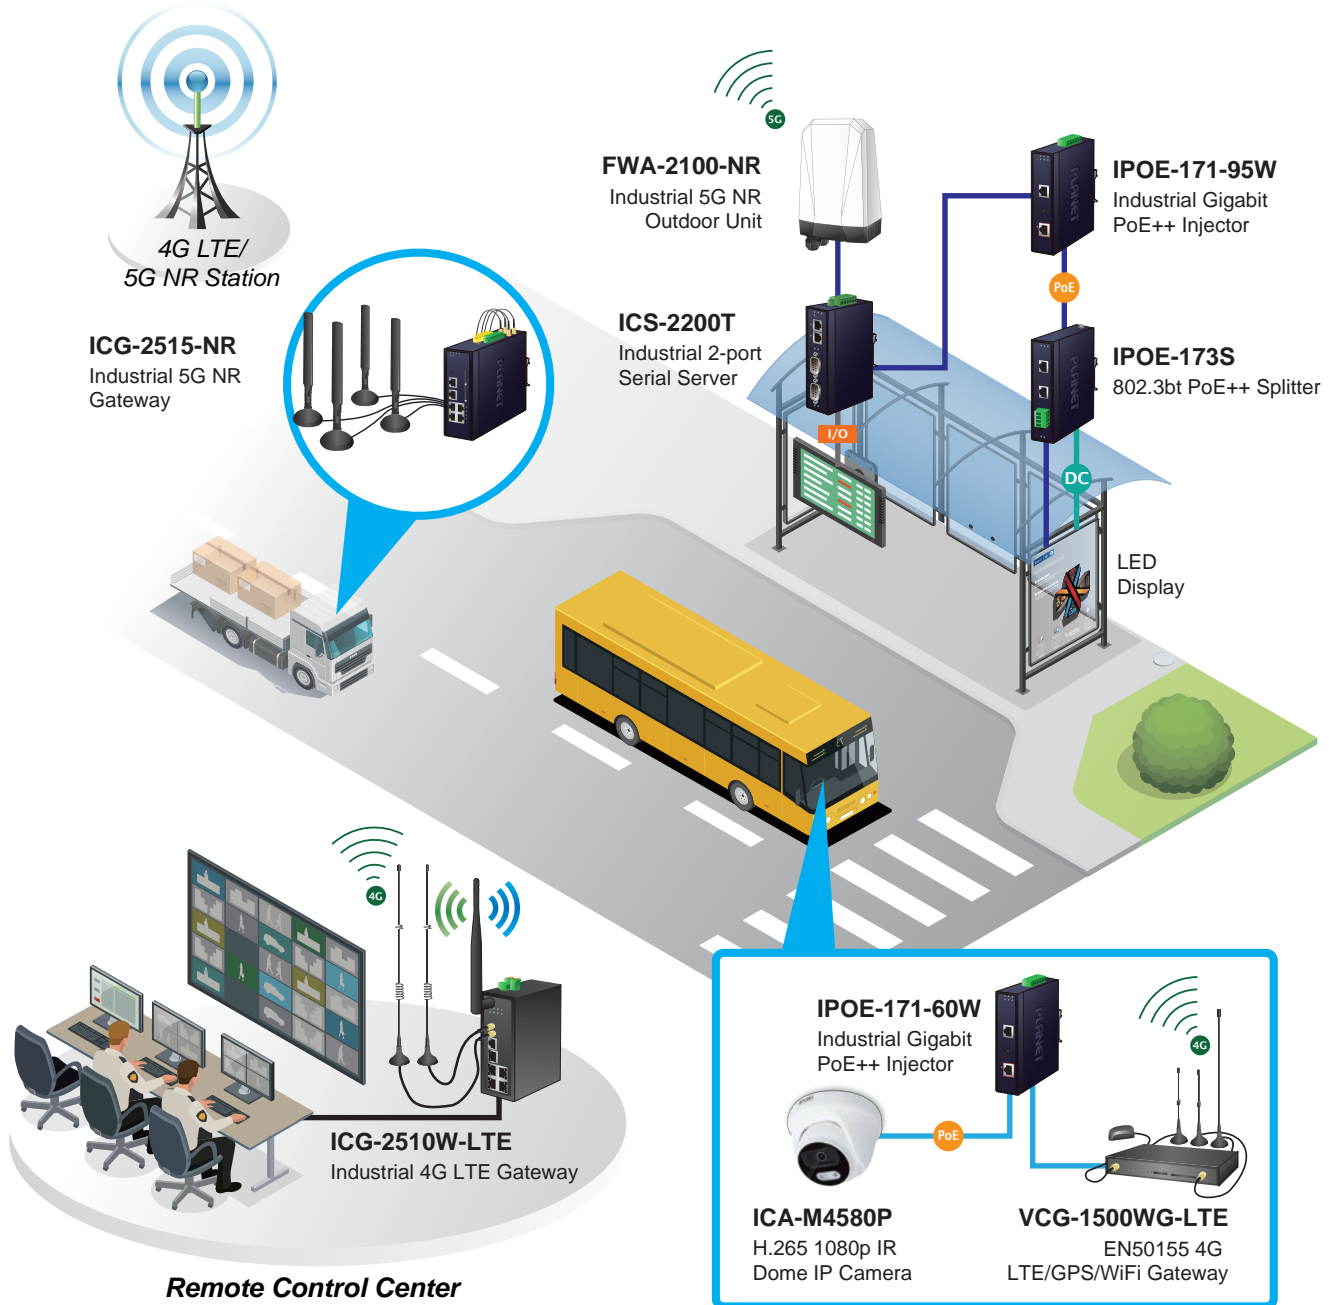

Industrial Automation

Designed for reliable, secure and smart industrial network Infrastructures for factory automation

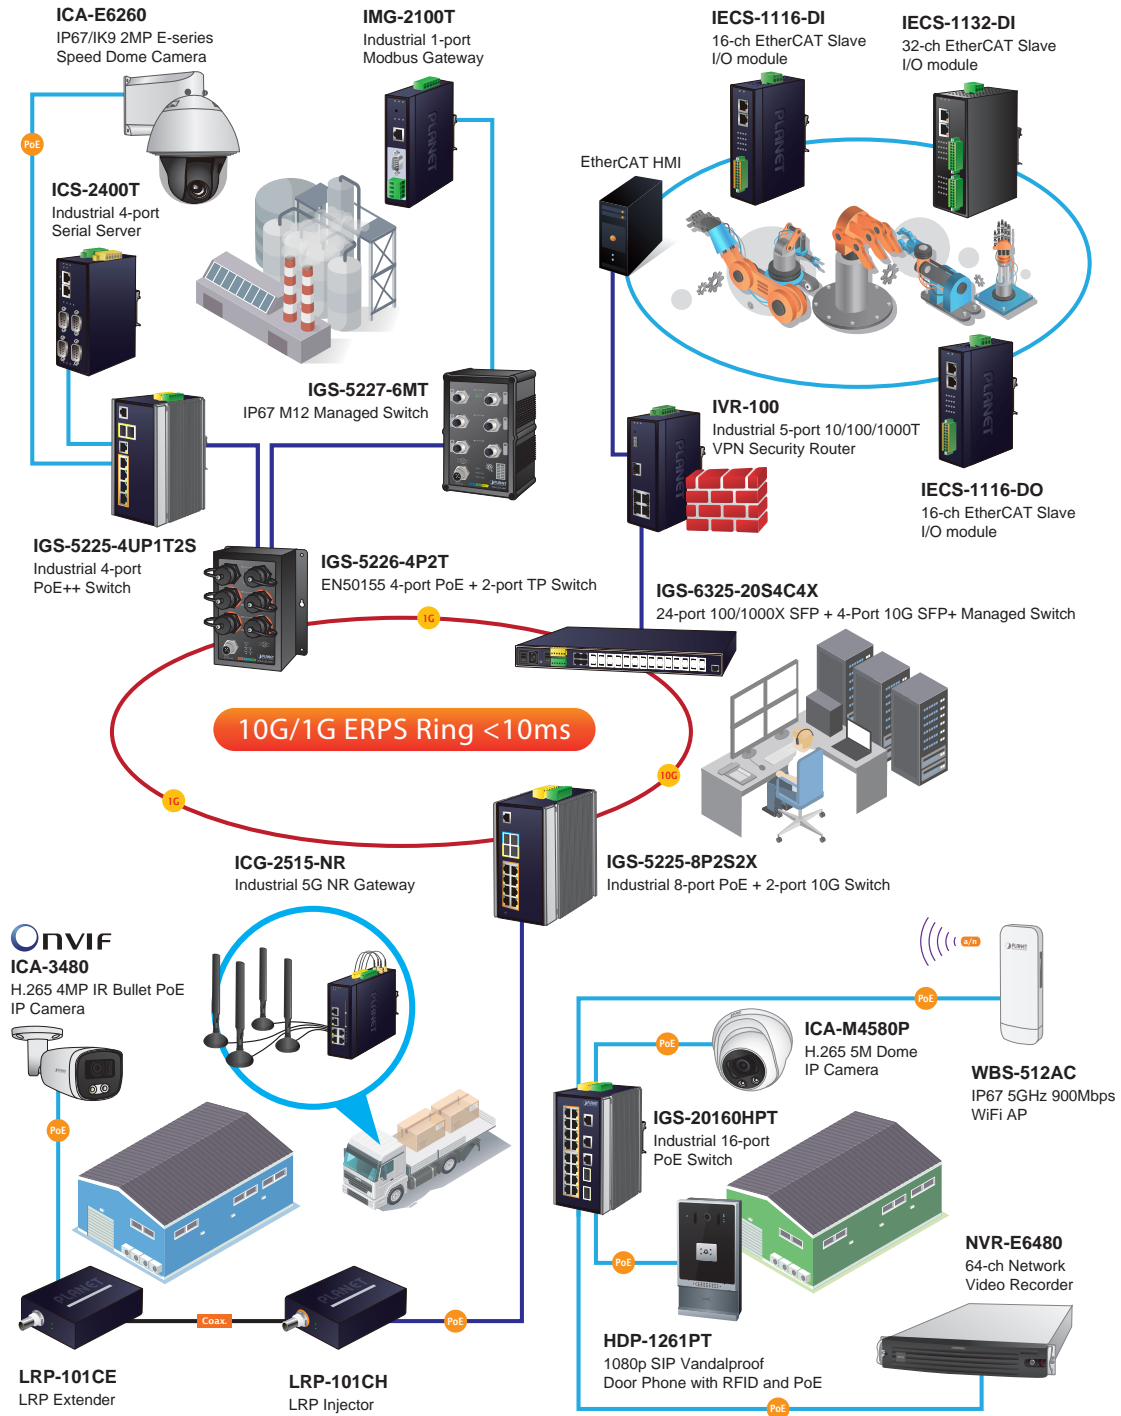

19" Rackmount Managed Ethernet Switches



	L3					L2+ Ring	
Model	IGS-6325-20T4C4X	IGS-6325-20S4C4X	IGS-6325-24UP4X	IGS-6325-24P4X	IGS-6325-24P4S	IGSW-24040T	IGS-5225-16T4S



Hardware	10/100/1000BASE-T	24	4 (Combo)	24	24	24	24	16
	10/100BASE-TX	-	-	-	-	-	-	-
	1000 mini-GBIC	4 (Combo)	24	-	4	4	4 (Combo)	4
	100BASE-FX	Compatible	Compatible	-	Compatible	Compatible	Compatible	Compatible
	10G SFP+ Slot	4 (1000X/2500X Compatible)		4 (1000X/2500X Compatible)		-	-	-
	Switch Fabric	128Gbps	158Gbps	128	128Gbps	48Gbps	48Gbps	40Gbps
	DI & DO	2 DI & DO	2 DI & DO	2 DI & 2 DO	2 DI & DO	2 DI & DO	2 DI & DO	2 DI & DO
Power	Inputs	Dual 24~60V DC 100~240V AC		Daul 48-54V DC	Dual 48~56V DC		Dual 36~60V DC 100~240V AC	
	Connector	6-pin terminal block, AC socket			6-pin terminal block		6-pin terminal block, AC socket	
	Consumption	42.7 watts	45 watts	1,522 watts	500 watts	500 watts	30 watts	15.2 watts
Mechanical	Dimensions (W x D x H)	440 x 200 x 44.5 mm		440 x 300 x 44 mm	440 x 300 x 44.5 mm		440 x 200 x 44.5 mm	
	Enclosure	IP30 metal	IP30 metal	IP30 metal case	IP30 metal	IP30 metal	IP30 metal	IP30 metal
	Mounting	Rackmount	Rackmount	Rack-mountable	Rackmount	Rackmount	Rackmount	Rackmount
Environment	Operating Temperature	-40~75 degrees C		-40~75 degrees C	-40~75 degrees C		-40~75 degrees C	
	Operating Humidity	5% to 95%RH (non-condensing)			5% to 95%RH (non-condensing)		5% to 95%RH (non-condensing)	
Regulatory	Emissions	FCC Class A, CE EN 61000-6-2	FCC Class A, CE EN 61000-6-2 EN 61000-6-4	FCC Class A, CE	FCC Class A, CE Class A		FCC Class A, CE Class A	
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), EC60068-2-6 (Vibration)						
PoE	PoE Standard	-	-	802.3bt/802.3at_af	802.3af/802.3at		-	-
	PoE Port	-	-	24	24	24	-	-
	PoE Budget	-	-	Single power input: 720W Dual power input: 1,440W	400 watts	400 watts	-	-
	PSE Type	-	-	End-span + Mid-span	End-span	End-span	-	-
	Power Pin Assignment	-	-	1/2(-), 3/6(+), 4/5(+), 7/8(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)	-	-
Layer 3 Features	IP Interfaces	128 VLAN	128 VLAN	128 VLAN	128 VLAN	128 VLAN	8 VLAN	8 VLAN
	Routing Tables	Static: 128 Dynamic: 4K	Static: 128 Dynamic: 4K	Static: 128 Dynamic: 4K	Static: 128 Dynamic: 4K	Static: 128 Dynamic: 4K	32	32
	Routing Protocols	OSPFv2, IPV6/IPV4 Static Routing		OSPFv2/v3, RIPv1/ v2, IPV6/IPV4 Static Routing	OSPFv2, IPV6/IPV4 Static Routing		IPV6/IPV4 Static Routing	
	Accelerated Hardware	•	•	•	•	•	-	-
Protocol	VLAN	Port-based VLAN/IEEE 802.1Q VLAN/Q-in-Q/Private VLAN/MAC-based VLAN/Protocol-based VLAN/Voice VLAN/MVR						
	IGMP Snooping	v1/v2/v3/query			v1/v2/v3/query		v1/v2/v3/query	
	Spanning Tree	802.1w/802.1s			802.1w/802.1s		802.1w/802.1s	
	Data Redundancy	ERPS Ring < 10ms			ERPS Ring < 10ms		ERPS Ring < 10ms	
	QoS	Port-based/802.1P/IP DSCP Policy-based/Voice VLAN						
	Security	802.1x, Static MAC, MAC filter, Port Security and IP Security						
	Traffic Control	In/out rate limit, storm control						
Management	Interface	Console, Web, telnet, SSHv2 and TLSv1.2						
	SNMP	v1, v2c, v3 and trap						
	Alarm	Power and port alarm						
	System Log	System Log and remote Syslog						


Metro Fiber Switches

	13" Rackmount		19" Rackmount	
Model	MGSD-10080F	MGS-6320-2T6S2X	MGSW-24160F	MGSW-28240F

Product Image




Fully Front Panel Access Design

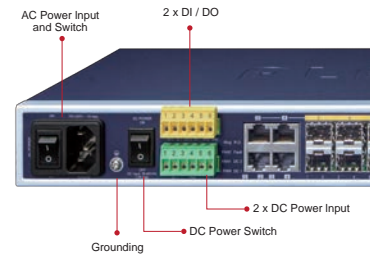

AC Power, DC Power, Digital I/O, and Network Access are all managed on the front panel.


Hardware	10/100/1000BASE-T	2	2	8	4 (Combo)
	10/100BASE-TX	-	-	-	-
	1000/2500BASE-X	2 x 2500 6 x 1000	4 x 2500 2 x 1000	16 x 1000	10 x 2500 14 x 1000
	100BASE-FX	Compatible	-	Compatible	Compatible
	10G SFP+ Slot	-	2 (1G/2.5Gbps compatible)	-	4 (1G/2.5Gbps Compatible)
	Switch Fabric	26Gbps	68Gbps	48Gbps	158Gbps
	DI & DO	2 DI & 2 DO	2 DI & 2 DO	2 DI & 2 DO	2 DI & 2 DO
Power	Inputs	Dual 36~60V DC 100~240V AC	Dual 24~57V DC 100~240V AC	Dual 36~60V DC 100~240V AC	Dual 36~60V DC 100~240V AC
	Connector	6-pin terminal block, AC socket			
	Consumption	11.2 watts	18 watts	45 watts	54 watts
Mechanical	Dimensions (W x D x H)	330 x 155 x 43.5 mm	330 x 155 x 43.5	440 x 200 x 44.5 mm	440 x 200 x 44.5 mm
	Enclosure	Metal chassis	Metal Chassis	Metal chassis	Metal chassis
	Mounting	Rackmount	Rackmount	Rackmount	Rackmount
Environment	Operating Temperature	-10~60 degrees C	-10~60 degrees C	-10~60 degrees C	-10~60 degrees C
	Operating Humidity	5% to 95%RH (non-condensing)			
Regulatory	Emissions	FCC Class A, CE Class A			
	Stability	-	-	-	-
PoE	PoE Standard	-	-	-	-
	PoE Port	-	-	-	-
	PoE Budget	-	-	-	-
	PSE Type	-	-	-	-
	Power Pin Assignment	-	-	-	-
Layer 3 Features	IP Interfaces	8 VLAN	32 VLAN	128 VLAN	128 VLAN
	Routing Tables	32	Static: 32 Dynamic: 1K	32	Static: 128 Dynamic: 4K
	Routing Protocols	IPv6/IPv4 Static Routing	RIPv1/v2, OSPFv2/v3 IPv6/IPv4 Static Routing	IPv6/IPv4 Static Routing	OSPFv2, IPv6/IPv4 Static Routing
	Accelerated Hardware	-	•	-	•
Protocol	VLAN	Port-based VLAN/IEEE 802.1Q VLAN/Q-in-Q/Private VLAN/Mac-based VLAN/Protocol-based VLAN/Voice VLAN/MVR/GVRP			
	IGMP Snooping	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query
	Spanning Tree	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s
	Data Redundancy	ERPS Ring < 10ms	ERPS Ring < 10ms	RSTP/MSTP	ERPS Ring < 10ms
	QoS	Port-based/802.1P/IP DSCP Policy-based/Voice VLAN			
	Security	802.1x, Static MAC, MAC filter, Port Security and IP Security			
	Traffic Control	In/out rate limit, storm control			
Management	Interface	Console, Web, telnet, SSH and SSL			
	SNMP	v1, v2c, v3 and trap			
	Alarm	Power and port alarm			
	System Log	System Log and remote Syslog			

Digital Input

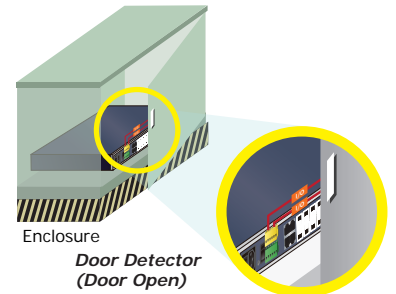





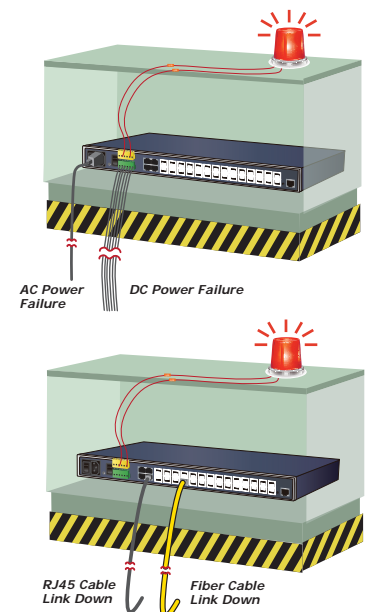


Designed for intrusion and environment detection to protect the assets.

Digital Output








Designed for AC, DC, link alteration






DIN-rail L3 Managed Ethernet Switches

L3								
Model	IGS-5225-8T2S2X	IGS-6325-5X1T	IGS-6325-16T4X	IGS-6325-8T8S4X	IGS-6325-8T8S	IGS-6325-8T4X	IGS-6325-4T2X	
Product Image								
	Modbus TCP			Modbus TCP		Modbus TCP		Modbus TCP
Hardware	10/100/1000BASE-T	8	-	16	8	8	8	4 100/1G/2.5GBASE-T
	1000/2500BASE-X	2	-	-	8	8	Compatible	-
	10G/5G/2.5G/1GBASE-T	-	1	-	-	-	-	-
	10G SFP+ Slot	2	5	4	4	-	4	2
	Switch Fabric	66Gbps	120Gbps	112Gbps	112Gbps	56Gbps	96Gbps	60Gbps
DI & DO	2 DI & 2 DO	2 DI & 2 DO	2 DI & 2 DO	2 DI & 2 DO	2 DI & 2 DO	2 DI & 2 DO	2 DI & 2 DO	
Power	Inputs	Dual 12~48V DC or 24V AC	Dual 9~48V DC or 24V AC		Dual 12~48V DC or 24V AC			Dual 9~48V DC or 24V AC
	Connector	6-pin terminal block		6-pin terminal block		6-pin terminal block		
	Consumption	20 watts	23 watts	24 watts	30 watts(TBD)	25 watts(TBD)	30 watts	12 watts
Mechanical	Dimensions (W x D x H)	76 x 107 x 152 mm	80 x 135 x 135 mm	96 x 107 x 152 mm	76 x 107 x 152 mm	76 x 107 x 152 mm		60 x 135 x 135 mm
	Enclosure	IP30 aluminum		IP30 aluminum		IP30 aluminum		
	Mounting	DIN-rail, wall-mountable		DIN-rail, wall-mountable		DIN-rail, wall-mountable		
Environment	Operating Temperature	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C	-40~95 degrees C	-40~95 degrees C	-40~75 degrees C
	Operating Humidity	5% to 95%RH (non-condensing)			5%~95% RH (Non-condensing)			5% to 95%RH (non-condensing)
Regulatory	Emissions	FCC Class A, CE Class A		FCC Class A, CE Class A		FCC Class A, CE Class A		
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)						
PoE	PoE Standard	-	-	-	-	-	-	-
	PoE Port	-	-	-	-	-	-	-
	PoE Budget	-	-	-	-	-	-	-
	PSE Type	-	-	-	-	-	-	-
	Power Pin Assignment	-	-	-	-	-	-	-
Layer 3 Features	IP Interfaces	128 VLAN	128 VLAN	128 VLAN	128 VLAN	128 VLAN	128 VLAN	32 VLAN
	Routing Tables	Static: 128 Dynamic: 4K	Static: 512 Dynamic: 3072	Static: 128 Dynamic: 4K	Static: 128 Dynamic: 4K	Static: 128 Dynamic: 4K	Static: 128 Dynamic: 4K	Static: 32 Dynamic: 1K
	Routing Protocols	OSPFv2, IPV6/IPv4 Static Routing		OSPFv2/v3, RIPv1/v2, IPV6/IPv4 Static Routing		OSPFv2, IPV6/IPv4 Static Routing		OSPFv2/v3, RIPv1/v2, IPV6/IPv4 Static Routing
	Accelerated Hardware	●	●	●	●	●	●	●
Protocol	VLAN	Port-based VLAN/IEEE 802.1Q VLAN/Q-in-Q/Private VLAN/Mac-based VLAN/Protocol-based VLAN/Voice VLAN/MVR/GVRP						
	IGMP Snooping	v1/v2/v3/query		v1/v2/v3/query			v1/v2/v3/query	
	Spanning Tree	802.1w/802.1s		802.1w/802.1s			802.1w/802.1s	
	Data Redundancy	ERPS Ring < 10ms		ERPS Ring < 10ms			ERPS Ring < 10ms	
	QoS	Port-based/802.1P/IP DSCP Policy-based/Voice VLAN						
	Security	802.1x, Static MAC, MAC filter, Port Security and IP Security						
	Traffic Control	In/out rate limit, storm control						
Management	Interface	Console, Web, telnet, SSHv2 and TLSv1.2						
	SNMP	v1, v2c, v3 and trap						
	Alarm	Power and port alarm						
	System Log	System Log and remote Syslog						






DIN-rail Managed TSN Ethernet Switches

		L3 TSN		L2+ TSN		
Model		TSN-6325-8T4S4X	TSN-5225-6T2C	TSN-5225-4T2S	TSN-5225-4T	TSN-900-2T2S
Product Image						
Hardware	10/100/1000BASE-T	8	8	4	4	2
	1000/2500BASE-X	4	2 x 1000X Combo	2	-	2
	10G/5G/2.5G/1GBASE-T	-	-	-	-	-
	10G SFP+ Slot	4	-	-	-	-
	Switch Fabric	116Gbps	16Gbps	12Gbps	8Gbps	8Gbps
DI/DO	2 DI & 2 DO	2 DI & 2 DO	2 DI & 2 DO	2 DI & 2 DO	2 DI & 2 DO	
Power	Inputs	Daul 9~48V DC or 24V AC	Daul 9~48V DC or 24V AC	Daul 9~48V DC or 24V AC	Daul 9~48V DC or 24V AC	Daul 9~48V DC or 24V AC
	Connector	6-pin terminal block	6-pin terminal block	6-pin terminal block	6-pin terminal block	6-pin terminal block
	Consumption	39 watts	14 watts	10 watts	10 watts	11 watts
Mechanical	Dimensions(W x D x H)	86 x 135 x 152 mm	60 x 135 x 135 mm	60 x 135 x 135 mm	60 x 135 x 135 mm	60 x 135 x 135 mm
	Enclosure	IP30 aluminum	IP30 aluminum	IP30 aluminum	IP30 aluminum	IP30 aluminum
	Mounting	DIN-rail, wall-mountable				
Environment	Operating Temperature	-40~75 degrees C				
	Operating Humidity	5% to 95%RH (non-condensing)				
Regulatory	Emissions	FCC Class A, CE Class A				
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), EC60068-2-6 (Vibration)				
PoE	PoE Standard	-	-	-	-	-
	PoE Port	-	-	-	-	-
	PoE Budget	-	-	-	-	-
	PSE Type	-	-	-	-	-
	Power Pin Assignment	-	-	-	-	-
Layer 3 Features	IP Interfaces	128 VLAN	8 VLAN	8 VLAN	8 VLAN	8 VLAN
	Routing Tables	Static: 512 Dynamic: 3072	Static: 32	Static: 32	Static: 32	Static: 32
	Routing Protocols	OSPFv2/v3, RIPv1/v2, IPv6/IPv4 Static Routing	-	-	-	-
	Accelerated Hardware	●	-	-	-	-
Protocol	VLAN	Port-based VLAN/IEEE 802.1Q VLAN/Q-in-Q/Private VLAN/Mac-based VLAN/Protocol-based VLAN/Voice VLAN/MVR/GVRP				
	IGMP Snooping	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query
	Spanning Tree	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s
	Data Redundancy	ERPS Ring < 10ms	ERPS Ring < 10ms	ERPS Ring < 10ms	ERPS Ring < 10ms	ERPS Ring < 10ms
	QoS	Port-based/802.1P/IP DSCP Policy-based/Voice VLAN				
	Security	802.1x, Static MAC, MAC filter, Port Security and IP Security				
	Traffic Control	In/out rate limit, storm control				
Time-Sensitive Networking Protocols	Synchronization	IEEE 1588v2 PTP(Precision Time Protocol), PTP Master/PTP Slave/Boundary clock IEEE 802.1AS-Rev gPTP default profile				
	Shapers	802.1Qbv (Time Aware Scheduling) 802.1Qch (Cyclic Queuing and Forwarding)				
	TSN Stream Policing	802.1Qci (Per Stream Filtering and Policing)				
	Redundancy	802.1CB (Seamless redundancy, Frame Replication and Elimination for Redundancy) Also standard Linear and Ring protection				
	Delay reduction	802.1Qbu/802.3br (Frame Preemption)				
Management	Interface	Console, Web, T1enet, SSHv2 and TLSv1.2				
	SNMP	v1, v2c, v3 and trap				
	Alarm	Power and port alarm				
	System Log	System Log and remote Syslog				







DIN-rail L2+ Managed Ethernet Switches

L2+ Ring						
Model	IGS-20040MT	IGS-12040MT	IGS-10020MT	IGS-10080MFT	IGS-5225-4T2S	
Product Image						
	Modbus TCP	Modbus TCP	Modbus TCP	Modbus TCP	Modbus TCP	
Hardware	10/100/1000BASE-T	16	8	8	2	4
	1000/2500BASE-X	4 x 1000	2 x 2500 2 x 1000	2	2 x 2500 6 x 1000	2
	100BASE-FX	Compatible	Compatible	Compatible	Compatible	Compatible
	10G SFP+ Slot	-	-	-	-	-
	Switch Fabric	40Gbps	30Gbps	26Gbps	26Gbps	18Gbps
	DI & DO	2 DI & 2 DO	2 DI & 2 DO	-	-	-
Power	Inputs	Dual 12~48V DC or 24V AC	Dual 12~72V DC or 24V AC	Dual 12~48V DC or 24V AC	Dual 12~48V DC or 24V AC	Dual 12~48V DC or 24V AC
	Connector	6-pin terminal block		6-pin terminal block		
	Consumption	17 watts	12 watts	10 watts	13.92 watts	6.5 watts
Mechanical	Dimensions (W x D x H)	76 x 107 x 152 mm	76 x 107 x 152 mm	56 x 87.8 x 135 mm	76 x 107 x 152 mm	32 x 87 x 135 mm
	Enclosure	IP30 aluminum	IP30 aluminum	IP30 aluminum	IP30 aluminum	IP30 metal
	Mounting	DIN-rail, wall-mountable	DIN-rail, wall-mountable	DIN-rail, wall-mountable	DIN-rail, wall-mountable	DIN-rail, wall-mountable
Environment	Operating Temperature	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C
	Operating Humidity	5% to 95%RH (non-condensing)		5% to 95%RH (non-condensing)		
Regulatory	Emissions	FCC Class A, CE Class A	FCC Class A, CE Class A	FCC Class A, CE Class A	FCC Class A, CE Class A	FCC Class A, CE Class A
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)				
PoE	PoE Standard	-	-	-	-	-
	PoE Port	-	-	-	-	-
	PoE Budget	-	-	-	-	-
	PSE Type	-	-	-	-	-
	Power Pin Assignment	-	-	-	-	-
Layer 3 Features	IP Interfaces	8 VLAN	8 VLAN	8 VLAN	8 VLAN	8 VLAN
	Routing Tables	32	32	32	32	32
	Routing Protocols	IPv6/IPv4 Static Routing	IPv6/IPv4 Static Routing	IPv6/IPv4 Static Routing	IPv6/IPv4 Static Routing	IPv6/IPv4 Static Routing
	Accelerated Hardware	-	-	-	-	-
Protocol	VLAN	Port-based VLAN/IEEE 802.0Q VLAN/Q-in-Q/Private VLAN/Mac-based VLAN/ Protocol-based VLAN/Voice VLAN/MVR/GVRP				
	IGMP Snooping	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query
	Spanning Tree	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s
	Data Redundancy	ERPS Ring < 10ms	ERPS Ring < 10ms	ERPS Ring < 10ms	ERPS Ring < 10ms	ERPS Ring < 10ms
	QoS	Port-based/802.1P/IP DSCP Policy-based/Voice VLAN				
	Security	802.1x, Static MAC, MAC filter, Port Security and IP Security				
	Traffic Control	In/out rate limit, storm control				
Management	Interface	Console, Web, telnet, SSHv2 and TLSv1.2				
	SNMP	v1, v2c, v3 and trap				
	Alarm	Power and port alarm	Power and port alarm	Power alarm	Power alarm	Power alarm
	System Log	System Log and remote Syslog				

DIN-rail L2/L4 Managed Ethernet Switches

L2/L4						
Model	IGS-4215-8T4X	IGS-4215-4T2S	IGS-4215-8T2S	IGS-4215-16T2S IGS-4215-16T2S-U	IGS-801M	
Product Image						
Hardware	10/100/1000BASE-T	8	4	8	16	8
	10/100BASE-TX	-	-	-	-	-
	1000/2500BASE-X	Compatible	2 x 1000	2 x 1000	2 x 1000	-
	100BASE-FX	Compatible	Compatible	Compatible	Compatible	-
	10G SFP+ Slot	4	-	-	-	-
	Switch Fabric	96Gbps	12Gbps	20Gbps	36Gbps	16Gbps
	DI & DO	2 DI & 2 DO	-	-	-	-
Power	Inputs	Dual 9~48V DC or 24V AC			Dual 12~48V DC or 24V AC	
	Connector	6-pin terminal block			6-pin terminal block	
	Consumption	16 watts	5 watts	7 watts	15 watts	10 watts
Mechanical	Dimensions (W x D x H)	76 x 135 x 152 mm	32 x 87 x 135 mm	50 x 87.8 x 135 mm	72 x 107 x 152 mm	32 x 87 x 135 mm
	Enclosure	IP30 aluminum	IP30 metal	IP30 metal	IP30 metal	IP30 metal
	Mounting	DIN-rail, wall-mountable	DIN-rail, wall-mountable	DIN-rail, wall-mountable	DIN-rail, wall-mountable	DIN-rail, wall-mountable
Environment	Operating Temperature	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C
	Operating Humidity	5%~95% RH(Non-condensing)			5% to 95%RH (non-condensing)	
Regulatory	Emissions	FCC Class A, CE Class A	FCC Class A, CE Class A	FCC Class A, CE Class A	FCC Class A, CE Class A	FCC Class A, CE Class A
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)				
PoE	PoE Standard	-	-	-	-	-
	PoE Port	-	-	-	-	-
	PoE Budget	-	-	-	-	-
	PSE Type	-	-	-	-	-
	Power Pin Assignment	-	-	-	-	-
Layer 3 Features	IP Interfaces	-	-	-	-	-
	Routing Tables	-	-	-	-	-
	Routing Protocols	-	-	-	-	-
	Accelerated Hardware	-	-	-	-	-
Protocol	VLAN	IEEE 802.1Q VLAN/Q-in-Q/Private VLAN/Protocol-based VLAN/Voice VLAN/GVRP				
	IGMP Snooping	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query
	Spanning Tree	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s
	Data Redundancy	ERPS Ring	ERPS Ring	ERPS Ring	ERPS Ring	ERPS Ring
	QoS	Port-based/802.1P/IP DSCP Policy-based/Voice VLAN				
	Security	802.1x, Static MAC, MAC filter, Port Security and IP Security				
	Traffic Control	In/out rate limit, storm control				
Management	Interface	Console, Web, telnet, SSHv2 and TLSv1.2				
	SNMP	v1, v2c, v3 and trap				
	Alarm	Power and port alarm				
	System Log	System Log and remote Syslog				

DIN-rail L3/L2+ Power over Ethernet Managed Ethernet Switches

		802.3bt PoE++					802.3at PoE+
Model	IGS-5225-4UP1T2S	IGS-6325-4UP2X	IGS-6325-8UP2S2X IGS-6325-8UP2S	IGS-6329-8UP2S2X	IGS-6329-8UP2S4X	IGS-6325-16P4S	
Product Image							
	Modbus TCP 90W	Modbus TCP 90W	Modbus TCP 90W	Modbus TCP 90W	Modbus TCP 90W	Modbus TCP	
Hardware	10/100/1000BASE-T	5	4 x 2.5G	8	8	8	16
	1000/2500BASE-X	2	Compatible	2	2	2	4
	100BASE-FX	Compatible	-	Compatible	Compatible	Compatible	Compatible
	10G SFP Slot	-	2	2/-	2	4	-
	Switch Fabric	14Gbps	60Gbps	60/26Gbps	60Gbps	100Gbps	52Gbps
	DI & DO	2 DI & DO	2 DI & 2 DO	2 DI & 2 DO	2 DI & 2 DO	2 DI & 2 DO	2 DI & DO
Power	Inputs	Dual 48~54V DC	Dual 48~54V DC	Dual 48~54V DC	Dual 48~54V DC	Dual 48~56V DC	Dual 48~56V DC
	Connector	6-pin terminal block			6-pin terminal block		
	Consumption	280 watts	381 watts	340/335 watts	401 watts	405 watts	440 watts
Mechanical	Dimensions (W x D x H)	76 x 107 x 152 mm	76 x 135 x 152 mm	76 x 107 x 152 mm	76 x 135 x 152 mm		82 x 107 x 152 mm
	Enclosure	IP30 aluminum	IP30 aluminum	IP30 aluminum	IP30 aluminum	IP30 aluminum	IP30 aluminum
	Mounting	DIN-rail, wall-mountable			DIN-rail, wall-mountable		DIN-rail, wall-mountable
Environment	Operating Temperature	-40~75 degrees C			-40~75 degrees C		-40~75 degrees C
	Operating Humidity	5% to 95%RH (non-condensing)			5% to 95%RH (non-condensing)		5% to 95%RH (non-condensing)
Regulatory	Emissions	FCC Class A, CE Class A			FCC Class A, CE Class A EN 61000-6-2, EN 61000-6-4, EN50121-4		FCC Class A, CE Class A
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)					
PoE	PoE Standard	802.3bt PoE++	802.3bt PoE++	802.3bt PoE++	802.3bt PoE++	802.3bt PoE++	802.3af/802.3at
	PoE Port	4	4	8	8	8	16
	PoE Budget	360 watts	360 watts	320 watts	360 watts	360 watts	320 watts max.
	PSE Type	Mid-span + End-span			Mid-span + End-span	Mid-span + End-span	End-span
	Power Pin Assignment	Pair1: 1/2(-), 3/6(+) Pair2: 4/5(+), 7/8(-)			Pair 1: 1/2(-), 3/6(+) Pair 2: 4/5(+), 7/8(-)		1/2(+), 3/6(-)
Layer 3 Features	IP Interfaces	8 VLAN	32 VLAN	128 VLAN	128 VLAN	128 VLAN	128 VLAN
	Routing Tables	Static: 32	Static: 32 Dynamic: 1K	Static: 128 Dynamic: 4K	Static: 128 Dynamic: 4K	Static: 128 Dynamic: 4K	Static: 128 Dynamic: 4K
	Routing Protocols	IPv6/IPv4 Static Routing	OSPFv2/v3, RIPv1/v2, IPv6/IPv4 Static Routing				OSPFv2, IPV6/ IPv4 Static Routing
	Accelerated Hardware	-	•	•	•	•	•
Protocol	VLAN	Port-based VLAN/IEEE 802.1Q VLAN/Q-in-Q/Private VLAN/Mac-based VLAN/Protocol-based VLAN/Voice VLAN/MVR/GVRP					
	IGMP Snooping	v1/v2/v3/query		v1/v2/v3/query		v1/v2/v3/query	
	Spanning Tree	802.1w/802.1s		802.1w/802.1s		802.1w/802.1s	
	Data Redundancy	ERPS Ring < 10ms		ERPS Ring < 10ms		ERPS Ring < 10ms	
	QoS	Port-based/802.1P/IP DSCP Policy-based/Voice VLAN					
	Security	802.1x, Static MAC, MAC filter, Port Security and IP Security					
	Traffic Control	In/out rate limit, storm control					
Management	Interface	Console, Web, telnet, SSHv2 and TLSv1.2					
	SNMP	v1, v2c, v3 and trap					
	Alarm	Power and port alarm					
	System Log	System Log and remote Syslog					

DIN-rail L3/L2+ Power over Ethernet Managed Ethernet Switches

802.3at PoE+

Model	IGS-5225-8P2S2X	IGS-5225-8P4S IGS-5225-8P4S-12V	IGS-5225-8P2T2S	IGS-5225-8P2T4S	IGS-10020PT IGS-10020HPT IGS-10020HPT-U	IGS-20160HPT	IGS-5225-4P2S
-------	-----------------	------------------------------------	-----------------	-----------------	---	--------------	---------------

Product Image



Modbus TCP



Modbus TCP



Modbus TCP



Modbus TCP



Modbus TCP






Modbus TCP







Modbus TCP

Hardware	10/100/1000BASE-T	8	8	8	8	8	18	4
	1000/2500BASE-X	2	2 x 1000 2 x 1000/2500	2	2 x 1000 2 x 1000/2500	2	2	2 x 1000
	100BASE-FX	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
	10G SFP+ Slot	2	-	-	-	-	-	-
Power	Switch Fabric	60Gbps	24Gbps	20Gbps	34Gbps	26Gbps	46Gbps	12Gbps
	DI & DO	2 DI & DO	2 DI & DO	2 DI & DO	2 DI & 2 DO	2 DI & DO	2 DI & DO	-
	Inputs	Dual 48~54V DC	Dual 48~54V DC Dual 12~54V DC	Dual 48~54V DC		Dual 12~48V DC Dual 48~56V DC	Dual 48~54V DC	
Mechanical	Connector	6-pin terminal block		6-pin terminal block		6-pin terminal block		
	Consumption	300 watts	262 watts	262 watts	265 watts	255 watts	382 watts	140 watts
	Dimensions (W x D x H)	76 x 107 x 152 mm		76 x 107 x 152 mm		76 x 107 x 152 mm	82 x 107 x 152 mm	56 x 87 x 135 mm
Environment	Enclosure	IP30 aluminum	IP30 aluminum	IP30 aluminum	IP30 aluminum	IP30 aluminum	IP30 aluminum	IP40 metal
	Mounting	DIN-rail, wall-mountable			DIN-rail, wall-mountable		DIN-rail, wall-mountable	
Regulatory	Operating Temperature	-40~75 degrees C			-40~75 degrees C		-40~75 degrees C	
	Operating Humidity	5% to 95%RH (non-condensing)			5%~95% RH (Non-condensing)		5% to 95%RH (non-condensing)	
PoE	Emissions	FCC Class A, CE Class A			FCC Class A, CE Class A		FCC Class A, CE Class A	
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)						
Layer 3 Features	PoE Standard	802.3af/802.3at	802.3af/802.3at	802.3af/802.3at	802.3af/802.3at	802.3af/802.3at	802.3af/802.3at	802.3af/802.3at
	PoE Port	8	8	8	8	8	16	4
	PoE Budget	240 watts max.	240 watts max.	240 watts max.	240 watts	240 watts max.	360 watts max.	120 watts max.
	PSE Type	End-span	End-span	End-span	End-span	End-span	End-span	End-span
	Power Pin Assignment	1/2(+), 3/6(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)
Protocol	IP Interfaces	128 VLAN	8 VLAN	8 VLAN	8 VLAN	8 VLAN	128 VLAN	8 VLAN
	Routing Tables	Static: 128 Dynamic: 4K	32	32	32	32	Static: 128 Dynamic: 4K	32
	Routing Protocols	OSPFv2, IPv6/IPv4 Static Routing	IPv6/IPv4 Static Routing		IPv6/IPv4 Static Routing		OSPFv2, IPv6/IPv4 Static Routing	IPv6/IPv4 Static Routing
	Accelerated Hardware	•	-	-	-	-	•	-
Management	VLAN	802.1Q VLAN/Q-in-Q/Private VLAN/MAC-based VLAN/Protocol-based VLAN/Voice VLAN/MVR/GVRP						
	IGMP Snooping	v1/v2/v3/query			v1/v2/v3/query		v1/v2/v3/query	
	Spanning Tree	802.1w/802.1s			802.1w/802.1s		802.1w/802.1s	
	Data Redundancy	ERPS Ring < 10ms			ERPS Ring < 10ms		ERPS Ring < 10ms	
	QoS	Port-based/802.1P/IP DSCP Policy-based/Voice VLAN						
	Security	802.1x, Static MAC, MAC filter, Port Security and IP Security						
	Traffic Control	In/out rate limit, storm control						
Management	Interface	Console, Web, telnet, SSHv2 and TLSv1.2						
	SNMP	v1, v2c, v3 and trap						
	Alarm	Power and port alarm						
	System Log	System Log and remote Syslog						


DIN-rail L2/L4 Power over Ethernet Managed Switches

802.3bt PoE++				
Model	IGS-4215-8UP4X	IGS-4215-8UP2T2S	IGS-4215-4UP4T2S	
Product Image				
Hardware	10/100/1000BASE-T	8	10	8
	1000 BASE-X	Compatible	2	2
	1000/2500BASE-X	Compatible	-	-
	100BASE-FX	Compatible	Compatible	Compatible
	10G SFP+ Slot	4	-	-
	Switch Fabric	96Gbps	24Gbps	20Gbps
	DI & DO	2 DI & 2 DO	-	-
Power	Inputs	Dual 48-54V DC	Dual 48-54V DC	Dual 48-54V DC
	Connector	6-pin terminal block	6-pin terminal block	6-pin terminal block
	Consumption	390 watts	380 watts	260 watts
Mechanical	Dimensions (W x D x H)	76 x 135 x 152mm	76 x 107 x 152 mm	76 x 107 x 152 mm
	Enclosure	IP30 aluminum	IP30 aluminum	IP30 aluminum
	Mounting	DIN-rail, wall-mountable	DIN-rail, wall-mountable	DIN-rail, wall-mountable
Environment	Operating Temperature	-40-75 degrees C	-40-75 degrees C	-40-75 degrees C
	Operating Humidity	5%-95% RH(Non-condensing)	5%-95% RH(Non-condensing)	5%-95% RH(Non-condensing)
Regulatory	Emissions	FCC Class A, CE Class A	FCC Class A, CE Class A	FCC Class A, CE Class A
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), EC60068-2-6 (Vibration)		
PoE	PoE Standard	802.3bt PoE++	802.3bt PoE++	802.3bt PoE++
	PoE Port	8	8	4
	PoE Budget	360 watts	360 watts	240 watts
	PSE Type	Mid-span + End-span	Mid-span + End-span	Mid-span + End-span
	Power Pin Assignment	Pair 1: 1/2(-), 3/6(+) Pair 2: 4/5(+), 7/8(-)	Pair 1: 1/2(-), 3/6(+) Pair 2: 4/5(+), 7/8(-)	Pair 1: 1/2(-), 3/6(+) Pair 2: 4/5(+), 7/8(-)
Layer 3 Features	IP Interfaces	-	-	-
	Routing Tables	-	-	-
	Routing Protocols	-	-	-
	Accelerated Hardware	-	-	-
Protocol	VLAN	IEEE 802.1Q VLAN/Q-in-Q/Private VLAN/Protocol-based VLAN/Voice VLAN/MVR/GVRP		
	IGMP Snooping	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query
	Spanning Tree	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s
	Data Redundancy	ERPS Ring	ERPS Ring	ERPS Ring
	QoS	Port-based/802.1P/IP DSCP Policy-based/Voice VLAN		
	Security	802.1x, Static MAC, MAC filter, Port Security and IP Security		
	Traffic Control	In/out rate limit, storm control		
Management	Interface	Console, Web, telnet, SSHv2 and TLSv1.2		
	SNMP	v1, v2c, v3 and trap		
	Alarm	Power and port alarm		
	System Log	System Log and remote Syslog		

DIN-rail L2/L4 Power over Ethernet Managed Switches


		802.3at PoE+			
Model		IGS-4215-4P4T	IGS-4215-4P4T2S	IGS-4215-8P2T2S	IGS-4215-16P2T2S
Product Image					
Hardware	10/100/1000BASE-T	8	8	10	18
	1000BASE-X	-	2	2	2
	1000/2500BASE-X	-	-	-	-
	100BASE-FX	-	Compatible	Compatible	Compatible
	10G SFP+ Slot	-	-	-	-
	Switch Fabric	16Gbps	20Gbps	24Gbps	40Gbps
DI & DO		-	-	-	2 DI & 2 DO
Power	Inputs	Dual 48-56V DC	Dual 48-54V DC	Dual 48-54V DC	Dual 48-54V DC
	Connector	6-pin terminal block	6-pin terminal block	6-pin terminal block	6-pin terminal block
	Consumption	160 watts	170 watts	280 watts	351 watts
Mechanical	Dimensions (W x D x H)	76 x 107 x 152 mm	76 x 107 x 152 mm	76 x 107 x 152 mm	76 x 135 x 152 mm
	Enclosure	IP30 aluminum	IP30 aluminum	IP30 aluminum	IP30 aluminum
	Mounting	DIN-rail, wall-mountable		DIN-rail, wall-mountable	
Environment	Operating Temperature	-40-75 degrees C		-40-75 degrees C	
	Operating Humidity	5% to 95%RH (non-condensing)		5% to 95%RH (non-condensing)	
Regulatory	Emissions	FCC Class A, CE Class A		FCC Class A, CE Class A	
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), EC60068-2-6 (Vibration)			
PoE	PoE Standard	802.3af/802.3at	802.3af/802.3at	802.3af/802.3at	802.3af/802.3at
	PoE Port	4	4	8	16
	PoE Budget	144 watts	144 watts	240 watts	320 watts
	PSE Type	End-span	End-span	End-span	End-span
	Power Pin Assignment	1/2(+), 3/6(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)
Layer 3 Features	IP Interfaces	-	-	-	-
	Routing Tables	-	-	-	-
	Routing Protocols	-	-	-	-
	Accelerated Hardware	-	-	-	-
Protocol	VLAN	IEEE 802.1Q VLAN/Q-in-Q/Private VLAN/Protocol-based VLAN/Voice VLAN/MVR/GVRP			
	IGMP Snooping	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query
	Spanning Tree	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s
	Data Redundancy	ERPS Ring	ERPS Ring	ERPS Ring	ERPS Ring
	QoS	Port-based/802.1P/IP DSCP Policy-based/Voice VLAN			
	Security	802.1x, Static MAC, MAC filter, Port Security and IP Security			
	Traffic Control	In/out rate limit, storm control			
Management	Interface	Console, Web, telnet, SSHv2 and TLSv1.2			
	SNMP	v1, v2c, v3 and trap			
	Alarm	Power and port alarm			
	System Log	System Log and remote Syslog			

Renewable Energy PoE Switch





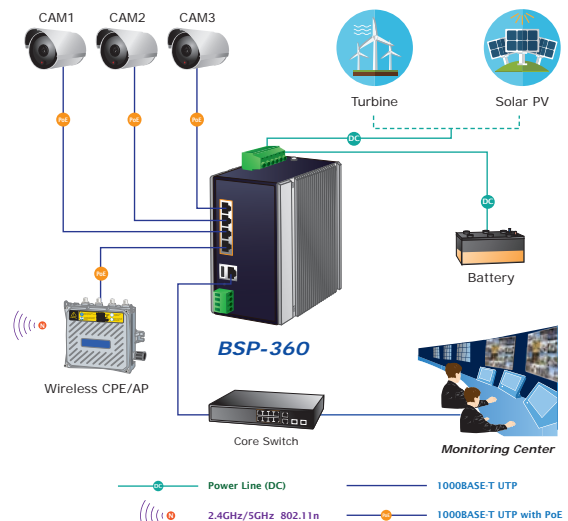

Model		BSP-360
Product Image		
LAN	10/100/1000	5
PoE	802.3at	4
PoE Budget		per port 30 watts (max.)
PSE Type		end-span
PoE Power Pin		1/2(+), 3/6 (-)
PoE Power Voltage		52V DC
Management		Web/SNMP
System Voltage/Battery Requirement		24V DC
Power IN		Solar or turbines 24-45V DC
Max. Charge Current		8.8A
Features		* 24V DC, 1A output load * Low voltage protection and alert * PoE schedule and management * USB Backup

Note: Check the total power consumption of your device and the sunshine duration of your area from weather bureau for a proper PV. Improper PV could shorten the battery life or provide insufficient power to Renewable Energy PoE Switch.

Renewable Energy Off-Grid PoE+ Network System Application




Industrial Power over Ethernet Unmanaged Switches

802.3at PoE+							
Model	ISW-504PT	ISW-514PTF	IGS-504PT	IGS-504HPT	IGS-614HPT	IGS-624HPT	
Product Image							Redundant Fiber
Hardware	10/100/1000BASE-T	-	-	5	5	5	4
	10/100BASE-TX	5	4	-	-	-	-
	1000BASE-SX/LX	-	-	-	-	1	2, compatible with 2500X
	100BASE-FX	-	1	-	-	Compatible	Compatible
	Fiber Connector Type	-	SFP	-	-	SFP	SFP
	Switch Fabric	1Gbps	1Gbps	10Gbps	10Gbps	12Gbps	12Gbps
	MAC Table	1K	1K	2K	2K	2K	4K
Mechanical	Dimensions (W x D x H)	50 x 87.8 x 135 mm	50 x 87.8 x 135 mm	30 x 70 x 104 mm	50 x 87 x 135 mm	50 x 87 x 135 mm	50 x 87 x 135 mm
	Enclosure	IP40 metal	IP40 metal	IP30 metal	IP40 metal	IP40 metal	IP40 metal
	Power Requirement	Dual 12~48V DC	Dual 12~48V DC	Dual 48~54V DC	Dual 12~56V DC	Dual 12~56V DC	Dual 12~56V DC
	Mounting	DIN-rail, wall-mountable		DIN-rail, wall-mountable		DIN-rail, wall-mountable	
Regulatory	EMI/Safety		FCC Class A, CE		FCC Class A, CE		FCC Class A, CE
Environment	Operating Temperature		-40~75 degrees C		-40~75 degrees C		-40~75 degrees C
PoE	PoE Standard	802.3at	802.3at	802.3at	802.3at	802.3at	802.3at
	PoE Port	4	4	4	4	4	4
	PoE Budget	60 watt max. @ 12V DC 120 watts max. @ 24~48V DC		120 watts		60 watt max. @ 12V DC 120 watts max. @ 24~48V DC	
	PSE Type	End-span		End-span		End-span	
	Power Pin Assignment	1/2(+), 3/6(-)		1/2(+), 3/6(-)		1/2(+), 3/6(-)	

802.3at PoE+							802.3bt PoE++
Model	IGS-1020PTF	IGS-1020PTF-12V	IFGS-1022HPT	IPOE-E174	IGS-824UPT	IGS-1000-8UP4X	
Product Image							PoE Extension
Hardware	10/100/1000BASE-T	8	8	2	5	6	8
	10/100BASE-TX	-	-	8	-	-	-
	1000BASE-SX/LX	2	2	2	-	2	Compatible
	100BASE-FX	Compatible	Compatible	-	-	Compatible	-
	10G SFP+ slot	-	-	-	-	-	4
	Fiber Connector Type	SFP	SFP	SFP	-	SFP	SFP+
	Switch Fabric	20Gbps	20Gbps	5.6Gbps	10Gbps	16Gbps	96Gbps
	MAC Table	8K	8K	16K	8K	8K	16K
Mechanical	Dimensions (W x D x H)	76 x 107 x 152 mm	76 x 107 x 152 mm	72 x 105 x 152 mm	32 x 87.8 x 135 mm	50 x 87 x 135 mm	76 x 135 x 152 mm
	Enclosure	IP30 metal	IP30 aluminum	IP30 aluminum	IP30 metal	IP30 metal	IP30 aluminum
	Power Requirement	Dual 48~56V DC	Dual 12~56V DC	48~56V DC	End-span + Mid-span 802.3bt PoE++ PD	48~56V DC	Dual 48 ~ 54V DC
	Mounting	DIN-rail, wall-mountable			DIN-rail, wall-mountable		
Regulatory	EMI/Safety		FCC Class A, CE Class A		FCC Class A, CE		FCC Class A, CE
Environment	Operating Temperature		-40~75 degrees C		-40~75 degrees C		-40~75 degrees C
PoE	PoE Standard	802.3at	802.3at	802.3at	802.3af/802.3at	802.3bt	802.3bt PoE++
	PoE Port	8	8	8	4	4	8
	PoE Budget	240 watts	60 watts max.@12V DC 120 watts max.@24V DC 240 watts max. @48~56V DC	240 watts max.	50 watts max.	240 watts max.	360 watts max.
	PSE Type	End-span	End-span	End-span	End-span	Mid-span + End-span	
	Power Pin Assignment	1/2(+), 3/6(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)	1/2(-), 3/6(+) 4/5(+), 7/8(-)	Pair 1: 1/2(-), 3/6(+) Pair 2: 4/5(+), 7/8(-)



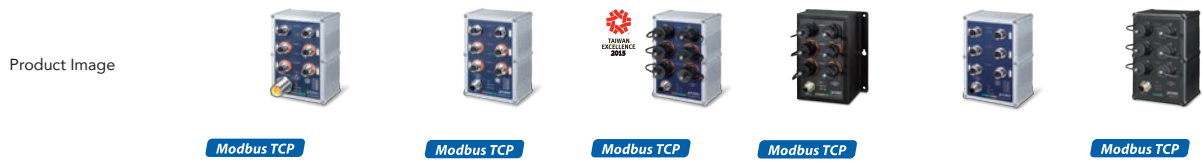

EN50155 Railway/Ethernet Switches & Extenders

	802.3at PoE+				L2+ Ring	
Model	IGS-5227X-4P2T	IGS-604HPT-M12	IGS-604HPT-RJ	IGS-5226-4P2T	IGS-5227-6MT-X	IGS-5227-6T



		Modbus TCP	Modbus TCP	Modbus TCP	Modbus TCP	Modbus TCP	Modbus TCP	
Hardware	10/100/1000BASE-T	6 x M12, 8-pin X-coded connector	6 x M12, 8-pin A-coded connector	6 x Waterproof RJ45	6 x Waterproof RJ45	6 x M12, 8-pin X-coded connector	6 x Waterproof RJ45	
	1000 mini-GBIC	-	-	-	-	-	-	
	100BASE-FX	-	-	-	-	-	-	
	Switch Fabric	12Gbps	12Gbps	12Gbps	12Gbps	12Gbps	12Gbps	
	DI & DO	-	-	-	-	-	-	
Power	Inputs	Dual 12-48V DC	Dual 48-56V DC	Dual 48-56V DC	Dual 48-56V DC	Dual 9-48V DC	Dual 9-48V DC	
	Connector	5-pin M23 male connector	5-pin A-Coded M12 male connector			5-pin A-Coded M12 male connector		
	Consumption	160 watts	160 watts	160 watts	160 watts	10 watts	10 watts	
Mechanical	Dimensions (W x D x H)	163 x 103 x 53 mm	163 x 103 x 53 mm	163 x 103 x 53 mm	163 x 103 x 53 mm	163 x 103 x 53 mm	163 x 103 x 53 mm	
	Enclosure	IP67 aluminum	IP67 aluminum	IP67 aluminum	IP50 metal	IP67 aluminum	IP67 aluminum	
	Mounting	DIN-rail, wall-mountable			DIN-rail, wall-mountable		DIN-rail, wall-mountable	
Environment	Operating Temperature	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C	
	Operating Humidity	5% to 95%RH (non-condensing)			5% to 95%RH (non-condensing)		5% to 95%RH (non-condensing)	
Regulatory	Emissions	FCC Class A, CE Class A			FCC Class A, CE Class A		FCC Class A, CE Class A	
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), EC60068-2-6 (Vibration)						
PoE	PoE Standard	802.3af/802.3at	802.3af/802.3at	802.3af/802.3at	802.3af/802.3at	-	-	
	PoE Port	4	4	4	4	-	-	
	PoE Budget	60 watts max.@12V DC 90 watts max.@24V DC 144 watts max. @48-56V DC	144 watts	144 watts	144 watts	-	-	
	PSE Type	End-span	End-span	End-span	End-span	-	-	
	Power Pin Assignment	1/2(+), 3/6(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)	-	-	
Layer 3 Features	IP Interfaces	8 VLAN	8 VLAN	8 VLAN	8 VLAN	8 VLAN	8 VLAN	
	Routing Tables	32	32	32	32	32	32	
	Routing Protocols	IPv6/IPv4 Static Routing			IPv6/IPv4 Static Routing		IPv6/IPv4 Static Routing	
	Accelerated Hardware	-	-	-	-	-	-	
Protocol	VLAN	Port-based VLAN/IEEE 802.1Q VLAN/Q-in-Q/Private VLAN/MAC-based VLAN/Protocol-based VLAN/Voice VLAN/MVR				802.1Q VLAN/Q-in-Q/Private VLAN/MAC-based VLAN, Protocol-based VLAN/Voice VLAN/MVR		
	IGMP Snooping	v1/v2/v3/query			v1/v2/v3/query		v1/v2/v3/query	
	Spanning Tree	802.1w/802.1s			802.1w/802.1s		802.1w/802.1s	
	Data Redundancy	ERPS Ring < 20ms			ERPS Ring < 20ms		ERPS Ring < 20ms	
	QoS	Port-based/802.1P/IP DSCP Policy-based/Voice VLAN						
	Security	802.1x, Static MAC, MAC filter, Port Security and IP Security						
	Traffic Control	In/out rate limit, storm control						
Management	Interface	Web, telnet, SSH and SSL						
	SNMP	v1, v2c, v3 and trap						
	Alarm	Power and port alarm						
	System Log	System Log and remote Syslog						

EN50155 Railway/Ethernet Switches & Extenders

M12 Switches				RJ45 Extenders	
Model	ISW-800T-M12	ISW-808PT-M12	ISW-800PT-M12A	IPOE-E302	
Product Image				 95W	
Hardware	Interface	8 x M12, 4-pin D-coded connector	8 x M12, 4-pin D-coded connector	8 x M12, 4-pin D-coded connector	3 x IP67 waterproof RJ45
	Data Rate	10/100Mbps	10/100Mbps	10/100Mbps	10/100/1000Mbps
	Power over Ethernet	-	8-port 802.3at PoE+	8-port 802.3at PoE+	1-port 802.3bt PoE PD 2-port 802.3bt/at PoE PSE
	Switch Fabric	1.6Gbps	1.6Gbps	1.6Gbps	6Gbps
Mechanical	Dimensions (W x D x H)	103 x 53 x 163 mm	103 x 53 x 163 mm	103 x 53 x 163 mm	150 x 72 x 44 mm
	Weight	976g	1,150g	1,150g	320g
	Enclosure	IP67 aluminum	IP67 aluminum	IP50 metal	IP67 aluminum
	Mounting	DIN-rail, wall-mountable	DIN-rail, wall-mountable	DIN-rail, wall-mountable	Wall-mountable
Power	Inputs	Dual 12-48V DC	Dual 12-56V DC	Dual 12-56V DC	50-57V DC PoE
	Connector	5-pin A-coded M12 male connector	5-pin A-coded M23 male connector		RJ45
	Consumption	4 watts	250 watts	250 watts	60-95 watts
Environment	Operating Temperature	-40-75 degrees C	-40-75 degrees C	-40-75 degrees C	-40-75 degrees C
	Operating Humidity	5% to 95%RH (non-condensing)	5% to 95%RH (non-condensing)		5% to 95%RH (non-condensing)
Regulatory	Emissions/Safety	FCC Class A, CE Class A	FCC Class A, CE Class A	FCC Class A, CE Class A	FCC Class A, CE Class A
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), EC60068-2-6 (Vibration)			

Flat-type Unmanaged Ethernet Switches

Switch			PoE+ Switch				
Model	WGS-810	WGS-803	WGS-804HP	WGS-818HP	WGS-814HP	WGS-E304PT	
Product Image							
Hardware	10/100/1000BASE-T	8	8	8	8	8	5
	10/100BASE-TX	-	-	-	-	-	-
	1000 mini-GBIC	-	-	-	-	-	-
	100BASE-FX	-	-	-	-	-	-
	Fiber Connector Type	-	-	-	-	-	-
	Switch Fabric	16Gbps	16Gbps	16Gbps	16Gbps	16Gbps	10Gbps
Power	Inputs	12V DC	12-48V DC or 24V AC	Dual 48-56V DC	Dual 48-56V DC	Dual 48-56V DC	802.3bt PoE++ Type 4 PD
	Connector	DC Socket	3-pin terminal block, DC socket		DC Socket	DC Socket	-
Mechanical	Dimensions (W x D x H)	148 x 25 x 134 mm	148 x 25 x 134 mm	148 x 25 x 134 mm	148 x 25 x 134 mm	148 x 25 x 134 mm	148 x 24.2 x 134 mm
	Enclosure	IP30 metal	IP30 metal	IP30 metal	IP30 metal	IP30 metal	IP30 metal
	Mounting	DIN-rail, wall-mountable and magnetic wall mount					
Environment	Operating Temperature	-20-60 degrees C	-10-60 degrees C	-10-60 degrees C	-20-60 degrees C	-20-60 degrees C	-40-75 degrees C
Regulatory	Emissions	FCC Class A, CE Class A		FCC Class A, CE Class A			FCC Class A, CE
PoE	PoE Standard	-	-	802.3af/802.3at	802.3af/802.3at	802.3af/802.3at	802.3at/802.3at
	PoE Port	-	-	4	8	4	4
	PoE Budget	-	-	120 watts	120 watts	60 watts	70 watts max.
	PSE Type	-	-	End-span	End-span	End-span	End-span
	Power Pin Assignment	-	-	1/2(+), 3/6(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)

Flat-type Managed Ethernet Switches

L2/L2+ Switches				
Model	WGS-4215-8T	WGS-4215-8T2S	WGS-5225-8T2SV	

Product Image



Hardware	LCD	-	-	2.4" Color TFT touch screen
	10/100/1000BASE-T	8	8	8
	10/100BASE-TX	-	-	-
	1000/2500BASE-X	-	2 x 1000	2
	100BASE-FX	-	Compatible	Compatible
	10G SFP+ Slot	-	-	-
	Switch Fabric	16Gbps	20Gbps	26Gbps
	DI/DO	-	-	-
Power	Inputs	12~48V DC or 24V AC	12~48V DC or 24V AC	12~48V DC or 24V AC
	Connector	3-pin terminal block, DC socket	3-pin terminal block, DC socket	3-pin terminal block, DC socket
	Consumption	7 watts	7.9 watts	12 watts
Mechanical	Dimensions (W x D x H)	148 x 25 x 134 mm	178 x 25 x 134 mm	180 x 25 x 134 mm
	Enclosure	IP30 metal	IP30 metal	IP30 metal
	Mounting	DIN-rail, wall-mountable and magnetic wall mount		
Environment	Operating Temperature	-40~75 degrees C	-40~75 degrees C	-20~70 degrees C
	Operating Humidity	5% to 95%RH (non-condensing)	5% to 95%RH (non-condensing)	5% to 95%RH (non-condensing)
Regulatory	Emissions	FCC Class A, CE Class A	FCC Class A, CE Class A	FCC Class A, CE Class A
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), EC60068-2-6 (Vibration)		
PoE	PoE Standard	-	-	-
	PoE Port	-	-	-
	PoE Budget	-	-	-
	PSE Type	-	-	-
	Power Pin Assignment	-	-	-
Layer 3 Features	IP Interfaces	-	-	8 VLAN
	Routing Tables	-	-	32
	Routing Protocols	-	-	IPv6/IPv4 Static Routing
	Accelerated Hardware	-	-	-
Protocol	VLAN	IEEE 802.1Q VLAN/Q-in-Q/Private VLAN/Protocol-based VLAN/Voice VLAN/GVRP		
	IGMP Snooping	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query
	Spanning Tree	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s
	Data Redundancy	ERPS Ring	ERPS Ring	ERPS Ring < 10ms
	QoS	Port-based/802.1P/IP DSCP Policy-based/Voice VLAN		
	Security	802.1x, Static MAC, MAC filter, Port Security and IP Security		
	Traffic Control	In/out rate limit, storm control		
Management	Interface	Web, telnet, SSHv2 and TLSv1.2	Web, telnet, SSHv2 and TLSv1.2	Web, telnet, SSHv2 and TLSv1.2
	SNMP	v1, v2c, v3 and trap	v1, v2c, v3 and trap	v1, v2c, v3 and trap
	Alarm	-	-	-
	System Log	System Log and remote Syslog	System Log and remote Syslog	System Log and remote Syslog

Flat-type Managed Ethernet Switches

	L3 PoE++	L2/L2+ PoE+ Switches				
Model	WGS-6325-8UP2X	WGS-5225-8UP2SV	WGS-5225-8P2SV	WGS-5225-8P2S	WGS-4215-16P2S	

Product Image



Hardware	LCD	-	2.4" Color TFT touch screen	2.4" Color TFT touch screen	-	-
	10/100/1000BASE-T	4 x 2.5G 4 x 1G	8	8	8	16
	10/100BASE-TX	-	-	-	-	-
	1000/2500BASE-X	Compatible	2	2	2	2 x 1000
	100BASE-FX	-	Compatible	Compatible	Compatible	Compatible
	10G SFP+ Slot	2	-	-	-	-
	Switch Fabric	68Gbps	26Gbps	26Gbps	26Gbps	36Gbps
DI/DO	-	-	-	-	-	-
Power	Inputs	Dual 48~54V DC	Dual 48~54V DC	Dual 48~54V DC	Dual 48~54V DC	Dual 48~54V DC
	Connector	4-pin terminal block		3-pin terminal block, DC socket		
	Consumption	497 watts	750 watts	265 watts	260 watts	240 watts
Mechanical	Dimensions (W x D x H)	245 x 36 x 140 mm	245 x 36 x 140 mm	180 x 25 x 134 mm	180 x 25 x 134 mm	245 x 25 x 134 mm
	Enclosure	IP30 aluminum	IP30 Aluminum	IP30 metal	IP30 metal	IP30 metal
	Mounting	Wall-mountable		DIN-rail, wall-mountable and magnetic wall mount		
Environment	Operating Temperature	-40~75 degrees C	-20~70 degrees C	-20~70 degrees C	-40~75 degrees C	-10~60 degrees C
	Operating Humidity	5% to 95%RH (non-condensing)			5% to 95%RH (non-condensing)	
Regulatory	Emissions	FCC Class A, CE Class A	FCC Class A, CE Class A	FCC Class A, CE Class A	FCC Class A, CE Class A	FCC Class A, CE Class A
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), EC60068-2-6 (Vibration)				
PoE	PoE Standard	802.3bt PoE++	802.3bt PoE++	802.3at PoE+	802.3at PoE+	802.3at PoE+
	PoE Port	8	8	8	8	8
	PoE Budget	480 watts	720 watts	240 watts	240 watts	240 watts
	PSE Type	Mid-span + End-span	Mid-span + End-span	End-span	End-span	End-span
	Power Pin Assignment	Pair 1: 1/2(-), 3/6(+) Pair 2: 4/5(+), 7/8(-)	1/2(-), 3/6(+) 4/5(+), 7/8(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)
Layer 3 Features	IP Interfaces	32 VLAN	8 VLAN	8 VLAN	8 VLAN	-
	Routing Tables	Static: 32 Dynamic: 1K	32	32	32	-
	Routing Protocols	OSPFv2/v3, RIPv1/v2, IPv6/IPv4 Static Routing	IPv6/IPv4 Static Routing	IPv6/IPv4 Static Routing	IPv6/IPv4 Static Routing	-
	Accelerated Hardware	●	-	-	-	-
Protocol	VLAN	IEEE 802.1Q VLAN/Q-in-Q/Private VLAN/Protocol-based VLAN/Voice VLAN/GVRP				
	IGMP Snooping	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query
	Spanning Tree	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s
	Data Redundancy	ERPS Ring < 10ms	ERPS Ring < 10ms	ERPS Ring < 10ms	ERPS Ring < 10ms	ERPS Ring
	QoS	Port-based/802.1P/IP DSCP Policy-based/Voice VLAN				
	Security	802.1x, Static MAC, MAC filter, Port Security and IP Security				
	Traffic Control	In/out rate limit, storm control				
Management	Interface	Web, telnet, SSHv2 and TLSv1.2				
	SNMP	v1, v2c, v3 and trap				
	Alarm	Power and port alarm	Power and port alarm	-	-	-
	System Log	System Log and remote Syslog				

Flat-type Managed Ethernet Switches

L2/L4 PoE+ Switches			
Model	WGS-4215-8HP2S	WGS-4215-8P2S	WGS-804HPT

Product Image



Hardware	LCD	-	-	-
	10/100/1000BASE-T	8	8	8
	10/100BASE-TX	-	-	-
	1000 mini-GBIC	2	2	-
	100BASE-FX	Compatible	Compatible	-
	10G SFP+ Slot	-	-	-
	Switch Fabric	20Gbps	20Gbps	16Gbps
	DI/DO	-	-	-
Power	Inputs	Dual 48~54V DC	Dual 48~56V DC	
	Connector	3-pin terminal block, DC socket		
	Consumption	350 watts	210 watts	152 watts
Mechanical	Dimensions (W x D x H)	245 x 36 x 140 mm	178 x 25 x 134 mm	148 x 25 x 134 mm
	Enclosure	IP30 metal	IP30 metal	IP30 metal
	Mounting	DIN-rail, wall-mountable and magnetic wall mount		
Environment	Operating Temperature	-40~75 degrees C		
	Operating Humidity	5% to 95%RH (non-condensing)		
Regulatory	Emissions	FCC Class A, CE Class A		
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), EC60068-2-6 (Vibration)		
PoE	PoE Standard	802.3bt/802.3at	802.3at	802.3at
	PoE Port	4 x 802.3bt 4 x 802.3at	8	4
	PoE Budget	360 watts	200 watts	144 watts
	PSE Type	End-sapn+Mid-sapn	End-sapn	End-sapn
	Power Pin Assignment	1/2(-), 3/6(+) 4/5(+), 7/8(-)	1/2(+), 3/6(-)	1/2(+), 3/6(-)
Layer 3 Features	IP Interfaces	-	-	-
	Routing Tables	-	-	-
	Routing Protocols	-	-	-
	Accelerated Hardware	-	-	-
Protocol	VLAN	IEEE 802.1Q VLAN/Q-in-Q/Private VLAN/Protocol-based VLAN/Voice VLAN/GVRP		
	IGMP Snooping	v2/v3/query		
	Spanning Tree	802.1w/802.1s		
	Data Redundancy	ERPS Ring		
	QoS	Port-based/802.1P/IP DSCP Policy-based/Voice VLAN		
	Security	802.1x, Static MAC, MAC filter, Port Security and IP Security		
	Traffic Control	In/out rate limit, storm control		
Management	Interface	Web, telnet, SSHv2 and TLSv1.2		
	SNMP	v1, v2c, v3 and trap		
	Alarm	-	-	-
	System Log	System Log and remote Syslog		

Flat-type Gigabit Routers

Model	Touch LCD	Managed PoE+
	WGR-500-4PV	WGR-500-4P

Product Image



Hardware	LCD	2.4" Color TFT Touch Screen	-
	10/100/1000BASE-T	5 (4 LAN, 1 WAN)	
Power	Inputs	Dual 48~56V DC	
	Connector	3-pin terminal block, DC socket	
Mechanical	Dimensions (W x D x H)	180 x 25 x 140 mm	
	Enclosure	IP30 metal	
	Mounting	DIN-rail, wall-mountable and magnetic wall mount	
Environment	Operating Temperature	-10~60 degrees C	
	Operating Humidity	5% to 95%RH (non-condensing)	
Regulatory	Emissions	FCC Class A, CE Class A	
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), EC60068-2-6 (Vibration)	
PoE	PoE Standard	802.3at PoE+	
	PoE Port	4	4
	PoE Budget	120 watts	120 watts
	PSE Type	End-span	End-span
	Power Pin Assignment	1/2(+), 3/6(-)	1/2(+), 3/6(-)
Protocol	VLAN	IEEE 802.1Q VLAN	
Management	Interface	Web	Web
	SNMP	v1, v2c	v1, v2c
	System Log	System log and remote Syslog	

Unique Flat-type Design with Touch LCD



Front Access



Flat Design



PoE Usage



DIN-rail Installation










Fiber Connection















Magnetic Installation

Industrial Long Reach PoE Switches, Injectors & Extenders

		Long Reach PoE Injectors			Switch	Long Reach PoE Extenders		
Model		LRP-101CH	LRP-101UH	LRP-111UH	LRP-422CST	LRP-101CE	LRP-101UE	LRP-111UE
Product Image								
Ethernet Interfaces	10/100BASE-TX	1 x RJ45 w/ PoE PD		1 x RJ45 w/ PoE++ PD	-	1 x RJ45 w/ PoE PSE		
	10/100/1000BASE-T	-	-	-	2	-	-	-
	1000BASE-SX/LX	-	-	-	2 (100BASE-FX Compatible)	-	-	-
	PoE Power	-	-	-	-	56V DC, 600mA max.	48~56V DC, 600mA max.	48-54V DC, 900mA max.
	Cabling	Cat. 5e or above	Cat. 5e or above	Cat. 5e or above	Cat. 5e or above	Cat. 5e or above	Cat. 5e or above	Cat. 5e or above
	Maximum Distance	100m	100m	100m	100m	100m	100m	1000m
Long Reach PoE Interfaces	Connectivity	1 x BNC female (PSE)	1 x RJ45 Copper (PSE)		4 x BNC female (PSE)	1 x BNC female (PD)	1 x RJ45 Copper (PD)	
	Cabling	Coaxial cable: 75ohm	Copper: 4-pair or 1-pair UTP	Copper: 4-pair UTP	Coaxial cable: 75ohm		Copper: 4-pair or 1-pair UTP	4-pair UTP
	Maximum Distance	1000m	500m	800m	1000m	1000m	500m	800m
	Data Rate	200m: 93Mbps/93Mbps 1000m: 55Mbps/73Mbps	200m: 94Mbps/94Mbps 500m: 30Mbps/30Mbps	500m: 100/100Mbps 800m: 10/10Mbps	200m: 93Mbps/93Mbps 1000m: 52Mbps/50Mbps	200m: 93Mbps/93Mbps 1000m: 55Mbps/73Mbps	200m: 94Mbps/94Mbps 500m: 30Mbps/30Mbps	500m: 100/100Mbps 800m: 10/10Mbps
	Power Output	48~56V DC, 36 watts max.	48~56V DC, 36 watts max.	48~54V DC, 95 watts max.	48~56V DC, 36 watts max.	-	-	-
	Total Power Budget	36 watts max.	36 watts max.	95 watts max.	144 watts max.	-	-	-
	Encryption	AES128-bit	AES128-bit	-	AES128-bit	AES128-bit	AES128-bit	-
PoE Ability	PoE Standard	Power over coaxial	Power over UTP	Power over UTP	Power over coaxial	802.3af/802.3at	802.3af/at	802.3bt/802.3at
	PoE Port	1 x BNC female (PSE)	1 x UTP	1 x UTP	4 x BNC female (PSE)	1 x RJ45 (PSE)	1 x RJ45 (PSE)	1 x RJ45 (PSE)
	PoE Power Output	41~56V DC	41~56V DC	41~54V DC	41~56V DC	56V DC, 600mA max.	48~56V DC, 600mA max.	48-54V DC, 900mA max.
Intelligent Power Control	Over Temperature Protection	-	-	-	●	-	-	-
	PD Alive Check	-	-	-	●	-	-	-
	PoE Schedule	-	-	-	●	-	-	-
	Power Limit	-	-	-	●	-	-	-
	Scheduled Power Recycling	-	-	-	●	-	-	-
Protocols	VLAN	-	-	-	802.1Q, Q-in-Q, Voice VLAN, Private VLAN	-	-	-
	Spanning Tree	-	-	-	802.1D/802.1w/802.1s	-	-	-
	IGMP Snooping	-	-	-	v1, v2, v3	-	-	-
Management	Interface	-	-	-	Console, Telnet, HTTP	-	-	-
	SNMP	-	-	-	v1, v2c, v3, trap	-	-	-
	SSH/SSL	-	-	-	● / ●	-	-	-
Physical	Dimensions (W x D x H)	94 x 70 x 26mm	94 x 70 x 26mm	30 x 70 x 104mm	72 x 107 x 152 mm	94 x 70 x 26mm	94 x 70 x 26mm	30 x 70 x 104 mm
	Power Requirements	DC: 48~56V DC, PoE: 802.3at input	DC: 48~56V DC, PoE: 802.3at input	DC: 48~54V DC, PoE: 802.3bt input	Dual 48~56V DC	37~56V DC PoC	37~56V DC PoC	37~54V DC Power over UTP
	Operating Temperature	-20~70 degrees C	-20~70 degrees C	-40~75 degrees C	-40~75 degrees C	-20~70 degrees C	-20~70 degrees C	-40~75 degrees C
Regulatory	EMI/Safety	FCC Class A, CE	FCC Class A, CE	FCC Class A, CE	FCC Class A, CE	FCC Class A, CE	FCC Class A, CE	FCC Class A, CE
Compatible Models		LRP-101CE	LRP-101UE	LRP-111UE	LRP-101CE	LRP-101CH LRP-422CST LRP-1622CS LRP-822CS	LRP-101UH	LRP-111UH





Unmanaged Fast Ethernet Switches






Fast Ethernet							
Model	ISW-500T	ISW-800T	ISW-501T	ISW-801T	ISW-511*	ISW-511S15 *	
Product Image							
Hardware	10/100BASE-TX	5	8	5	8	4	4
	10/100/1000BASE-T	-	-	-	-	-	-
	100BASE-FX	-	-	-	-	1/Multi-mode/2km	1/Single mode/15km
	Switch Fabric	1Gbps	1.6Gbps	1Gbps	1.6Gbps	1Gbps	1Gbps
	MAC Table	1k	1k	2k	2k	2k	2k
	Memory Buffer	448k bits	448k bits	448k bits	448k bits	448k bits	448k bits
Protocol	Auto-negotiation	●	●	●	●	●	●
	802.3x Flow Control	●	●	●	●	●	●
Power	Inputs	12-48V DC/24VAC, Dual power input		12-48VDC, Dual power input		12-48VDC, Dual power input	
	Connector	6-pin Removable Terminal Block		6-pin Removable Terminal Block		6-pin Removable Terminal Block	
	Consumption	2 watts	2.5 watts	3.9 watts	5.1 watts	5.4 watts	5.4 watts
Mechanical	Dimensions (W x D x H)	30 x 70 x 104 mm	41 x 70 x 115mm	32 x 87.8 x 135 mm	32 x 87.8 x 135 mm	32 x 87.8 x 135 mm	
	Enclosure	IP30 metal	IP30 metal	IP30 metal	IP30 metal	IP30 metal	IP30 metal
	Mounting	DIN-Rail, Wall-mountable		DIN-Rail, Wall-mountable		DIN-Rail, Wall-mountable	
Environment	Operating Temperature	-40~75 degrees C		-40~75 degrees C		-10~60 degrees C *	
	Operating Humidity	5% to 95%RH (non-condensing)		5% to 95%RH (non-condensing)		5% to 95%RH (non-condensing)	
Regulatory	Emissions / Safety	FCC Class A, CE Class A, UL		FCC Class A, CE Class A		FCC Class A, CE Class A	
	Stability	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)					

Fast Ethernet							
Model	ISW-621*	ISW-621S15 *	ISW-621TF	IFGS-1022TF	ISW-1600T	IFGS-1822TF	
Product Image							
Hardware	10/100BASE-TX	4	4	4	8	16	16
	10/100/1000BASE-T	-	-	-	2	-	2
	100BASE-FX	2/Multi-mode/2km	2/Single mode/15km	2 SFP Slots	2 1000X SFP Slots	-	2 1000X SFP Slots
	Switch Fabric	1.2Gbps	1.2Gbps	1.2Gbps	5.6Gbps	3.2Gbps	3.6Gbps
	MAC Table	2k	2k	2k	16k	2k	2k
	Memory Buffer	448k bits	448k bits	448k bits	4Mbits	4Mbits	4Mbits
Protocol	Auto-negotiation	●	●	●	●	●	●
	802.3x Flow Control	●	●	●	●	●	●
Power	Inputs	12-48VDC, Dual power input	12-48VDC, Dual power input	12-48VDC, Dual power input	12-48VDC, Dual power input	12-48VDC, Dual power input	12-48VDC, Dual power input
	Connector	6-pin Removable Terminal Block		6-pin Removable Terminal Block		6-pin Removable Terminal Block	
	Consumption	7.9 watts	7.9 watts	7.9 watts	7.2 watts	15 watts	15 watts
Mechanical	Dimensions (W x D x H)	32 x 87.8 x 135 mm	32 x 87.8 x 135 mm	32 x 87.8 x 135 mm	50 x 87 x 135 mm	65 x 107 x 152 mm	65 x 107 x 152 mm
	Enclosure	IP30 metal	IP30 metal	IP30 metal	IP30 metal	IP40 metal	IP40 metal
	Mounting	DIN-Rail, Wall-mountable		DIN-Rail, Wall-mountable		DIN-Rail, Wall-mountable	
Environment	Operating Temperature	-10~60 degrees C *	-10~60 degrees C *	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C
	Operating Humidity	5% to 95%RH (non-condensing)		5% to 95%RH (non-condensing)		5% to 95%RH (non-condensing)	
Regulatory	Emissions / Safety	FCC Class A, CE Class A		FCC Class A, CE Class A		FCC Class A, CE, UL	FCC Class A, CE Class A
	Stability	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)					




* Wide Temperature models (-40~75 degrees C): ISW-511T, ISW-511TS15, ISW-621T, ISW-621TS15






Unmanaged Gigabit Ethernet Switches

Gigabit					
Model	IGS-500T	IGS-510TF	IGS-501T	IGS-801T	
Product Image					
Hardware	10/100/1000BASE-T	5	4	5	8
	10/100BASE-TX	-	-	-	-
	1000BASE-SX/LX	-	1 (100BASE-FX Compatible)	-	-
	Switch Fabric	10Gbps	10Gbps	10Gbps	16Gbps
	MAC Table	2k	2k	2k	8k
	Memory Buffer	1Mbits	1Mbits	1Mbits	176k Bytes
Protocol	Auto-negotiation	●	●	●	●
	802.3x Flow Control	●	●	●	●
Power	Inputs	12-48V DC/24V AC, Dual power input	9-48V DC/24V AC, Dual power input	12-48VDC, Dual power input	12-48VDC, Dual power input
	Connector	6-pin removeable terminal block	4-pin removeable terminal block	6-pin removeable terminal block	6-pin removeable terminal block
	Consumption	5.28 watts	4.3 watts	5.28 watts	6.7 watts
Mechanical	Dimensions (W x D x H)	30 x 10 x 104 mm	30 x 10 x 104 mm	32 x 87.8 x 135 mm	32 x 87.8 x 135 mm
	Enclosure	IP30 metal	IP30 metal	IP30 metal	IP30 metal
	Mounting	DIN-rail, Wall-mountable	DIN-rail, Wall-mountable	DIN-rail, Wall-mountable	DIN-rail, Wall-mountable
Environment	Operating Temperature	-40-75 degrees C	-40-75 degrees C	-40-75 degrees C	-40-75 degrees C
	Operating Humidity	5% to 95%RH (non-condensing)	5% to 95%RH (non-condensing)	5% to 95%RH (non-condensing)	5% to 95%RH (non-condensing)
Regulatory	Emissions / Safety	FCC Class A, CE Class A, UL	FCC Class A, CE Class A	FCC Class A, CE Class A, UL, cUL	
	Stability	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)			







Gigabit						
Model	IGS-620TF	IGS-1020TF	IGS-1600T	IGS-1820TF	IGS-1000-8T4X	
Product Image						
Hardware	10/100/1000BASE-T	4	8	16	8	
	10/100BASE-TX	-	-	-	-	
	1000BASE-SX/LX	2 (100BASE-FX Compatible)	2	-	2 (100BASE-FX Compatible)	Compatible
	10G SFP+ Slot	-	-	-	-	4
	Switch Fabric	12Gbps	20Gbps	32Gbps	36Gbps	96Gbps
	MAC Table	1k	8K	8K	8K	16K
	Memory Buffer	-	-	-	-	12Mbits
Protocol	Auto-negotiation	●	●	●	●	
	802.3x Flow Control	●	●	●	●	
Power	Inputs	12-48VDC, Dual power input		12-48VDC, Dual power input		
	Connector	6-pin removeable terminal block		6-pin removeable terminal block		
	Consumption	12 watts	8.7 watts	16 watts	18 watts	15 watts
Mechanical	Dimensions (W x D x H)	32 x 87.8 x 135 mm	56 x 87.8 x 135 mm	65 x 107 x 152 mm	65 x 107 x 152 mm	76 x 135 x 152 mm
	Enclosure	IP30 metal	IP30 metal	IP30 metal	IP30 metal	IP30 aluminum
	Mounting	DIN-rail, Wall-mountable		DIN-rail, Wall-mountable	DIN-rail, Wall-mountable	DIN-rail, Wall-mountable
Environment	Operating Temperature	-40-75 degrees C		-40-75 degrees C	-40-75 degrees C	
	Operating Humidity	5% to 95%RH (non-condensing)				
Regulatory	Emissions / Safety	FCC Class A, CE Class A		FCC Class A, CE Class A, UL	FCC Class A, CE Class A	
	Stability	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)				

Industrial Media Converters








		Fast Ethernet		
Model	IFT-802T	IFT-802TS15	IFT-805AT	
Product Image				
Copper	Copper Interface	1 x 10/100BASE-TX, RJ45, Auto-negotiation, Auto-MDI/MDI-X		
Fiber	Optical Interface	100BASE-FX	100BASE-FX	100BASE-FX
	Optical Connector	SC	SC	SFP
	Optical Mode	Multi-mode	Single mode	Vary on module
	Max. Distance	2km	15km	Vary on module
	Optic Wavelength	1310nm	1310nm	Vary on module
	Fiber-optic Cable	50/125µm or 62.5/125µm multi-mode	9/125µm single mode	Vary on module
Mechanical	Dimensions (W x D x H)	32 x 87.8 135 mm	32 x 87.8 135 mm	32 x 87.8 135 mm
	Weight	400g	400g	400g
	Enclosure	IP30 metal	IP30 metal	IP30 metal
	Mounting	DIN-rail, wall-mountable		DIN-rail, wall-mountable
Power	Inputs	Dual 12~48V DC	Dual 12~48V DC	Dual 12~48V DC
	Connector	6-pin removable terminal block		
	PoE	-	-	-
	Consumption	4.6 watts max.	4.6 watts max.	4.6 watts max.
Environment	Operating Temperature	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C
	Operating Humidity	5% to 95%RH (non-condensing)		5% to 95%RH (non-condensing)
Regulatory	Emissions	FCC Class A, CE Class A		FCC Class A, CE Class A
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), EC60068-2-6 (Vibration)		
Management		-	-	-

		Gigabit PoE				
Model	IGTP-815AT	IGTP-805AT	IGUP-805AT	IGUP-1205AT	IGUP-2205AT	
Product Image						
Copper	Copper Interface	1 x 10/100/1000BASE-T, RJ45, Auto-negotiation, Auto-MDI/MDI-x		2 x 10/100/1000BASE-T, RJ45, Auto-negotiation, Auto-MDI/MDI-x		
Fiber	Optical Interface	100/1000BASE-X	1000BASE-X	100/1000BASE-X	100/1000BASE-X	100/1000BASE-X
	Optical Connector	1 x SFP	SFP	1 x SFP	2 x 1000BASE-SX/LX/BX SFP Compatible with 100BASE-FX SFP	
	Optical Mode	Vary on module	Vary on module	Vary on module	Vary on module	Vary on module
	Max. Distance	Vary on module	Vary on module	Vary on module	Vary on module	Vary on module
	Optic Wavelength	Vary on module	Vary on module	Vary on module	Vary on module	Vary on module
	Fiber-optic Cable	Vary on module	Vary on module	Vary on module	Vary on module	Vary on module
Mechanical	Dimensions (W x D x H)	30 x 70 x 104 mm	32 x 87.8 x 135 mm	32 x 87 x 135 mm	55 x 85 x 135 mm	55 x 85 x 135 mm
	Weight	251g	500g	484g	612g	665g
	Enclosure	IP30 metal	IP30 metal	IP30 metal	IP30 metal	IP30 metal
	Mounting	DIN-rail kit and wall-mount ear	DIN-rail, wall-mountable	DIN-rail kit and wall-mount ear	DIN-rail kit and wall-mount ear	DIN-rail kit and wall-mount ear
Power	Inputs	DC 48~54V	DC 48~54V	DC 12~54V	Dual 12~54V DC	Dual 12~54V DC
	Connector	2-pin removable terminal block	6-pin removable terminal block	6-pin removable terminal block	6-pin removable terminal block	6-pin removable terminal block
	PoE	36 watts max.	30 watts max.	90 watts max.	90 watts max.	180 watts max.
	Consumption	43.12W	33W	DC 12V: 82W DC 48V: 98W	DC 12V: 82W DC 48V: 98W	DC 12V: 82W DC 48V: 98W
Environment	Operating Temperature	-40~75 degrees C			-40~75 degrees C	
	Operating Humidity	5%~90% RH (non-condensing)			5%~90% RH (non-condensing)	
Regulatory	Emissions	FCC Class A, CE Class A			FCC Class A, CE Class A	
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), EC60068-2-6 (Vibration)				
Management		-	-	-	-	-




Industrial Media Converters

		Gigabit				Managed	
Model		IGT-815AT	IGT-805AT	IGT-1205AT	IGT-2205AT	IGT-900-1T1S	IGT-900-2T2S
Product Image							
Copper	Copper Interface	1 x 10/100/1000BASE-T, RJ45, Auto-negotiation, Auto-MDI/MDI-X		2 x 10/100/1000BASE-T, RJ45, Auto-negotiation, Auto-MDI/MDI-X		1 x 10/100/1000BASE-T	2 x 10/100/1000BASE-T
Fiber	Optical Interface	100/1000BASE-X	100/1000BASE-X	100/1000/2500BASE-X		1 x 100/1000/2500BASE-X	
	Optical Connector	1 x SFP	SFP	SFP	SFP	SFP	SFP
	Optical Mode	Vary on module	Vary on module	Vary on module	Vary on module	Vary on module	Vary on module
	Max. Distance	Vary on module	Vary on module	Vary on module	Vary on module	Vary on module	Vary on module
	Optic Wavelength	Vary on module	Vary on module	Vary on module	Vary on module	Vary on module	Vary on module
	Fiber-optic Cable	Vary on module	Vary on module	Vary on module	Vary on module	Vary on module	Vary on module
Mechanical	Dimensions (W x D x H)	30 x 70 x 104 mm	32 x 87.8 135 mm	32 x 87.8 135 mm	32 x 87.8 135 mm	32 x 87 x 135mm	32 x 87 x 135mm
	Weight	251g	458g	400g	400g	405g	405g
	Enclosure	IP30 metal	IP30 metal	IP30 metal	IP30 metal	IP30 metal	IP30 metal
	Mounting	DIN-rail kit and wall-mount ear	DIN-rail, wall-mountable			DIN-rail, wall-mountable	
Power	Inputs	DC 9-48V AC 24V	Dual 12-48V DC	Dual 12-48V DC	Dual 12-48V DC	Dual 9-48V DC	Dual 9-48V DC
	Connector	2-pin Removable terminal Block	6-pin removable terminal block			6-pin removable terminal block	
	PoE	-	-	-	-	-	-
	Consumption	2 watts max.	3.3 watts max.	7.5 watts max.	8.5 watts max.	7.7 watts max.	7.7 watts max.
Environment	Operating Temperature	-40~75 degrees C		-40~75 degrees C		-40~75 degrees C	
	Operating Humidity	5% to 95%RH (non-condensing)				5% to 95%RH (non-condensing)	
Regulatory	Emissions	FCC Class A, CE Class A		FCC Class A, CE Class A		FCC Class A, CE Class A	
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), EC60068-2-6 (Vibration)					
Management		-	-	-	-	WEB, SNMPv1,v2c,v3, RMON, 802.1Q VLAN, QinQ, Port Backup, LFP, ERPS	





Industrial 10Gigabit Media Converters





		Managed				10G PoE		Unmanaged
Model		IXT-900-2X1T	IXT-900-2X	IXT-900-1X1T	IXT-900-2X1PD	IXT-900-2X1UP	IXT-900-1X1UP	IXT-705AT
Product Image								
Copper	Ports	-	1	1	1 (PoE PD)	1	1	1
	Interface Capability	100/1G/2.5G/5G/10GBASE-T RJ45				100/1G/2.5G/5G/10GBASE-T RJ45		
Fiber	Ports	2	2	2	1	2	1	1
	Interface Capability	100/1G/2.5G/10GBASE-X SFP+				100/1G/2.5G/10GBASE-X SFP+		10GBASE-X
	Optical Mode	Vary on module				Vary on module		Vary on module
	Optical Wavelength	Vary on module				Vary on module		Vary on module
	Fiber-optic Cable	Vary on module				Vary on module		Vary on module
Mechanical	Dimensions(W x D x H)	50 x 87 x 135 mm				50 x 87 x 135 mm		32 x 87 x 135mm
	Weight	576g	609g	604g	578g	576g	578g	400g
	Enclosure	IP40 metal				IP40 metal		IP30 metal
	Mounting	DIN-rail, wall-mountable				DIN-rail, wall-mountable		DIN-rail, wall-mountable
Power	Inputs	Dual 9 ~ 48V DC, or 24V AC				Dual 12 ~ 54V DC		Dual 12-48V DC
	Connector	6-pin removable terminal block				6-pin removable terminal block		
	PoE	-	-	-	-	95 watts 802.3bt PoE++		-
	Consumption	5.6 watts	11.5 watts	9.5 watts	10.7 watts	110 watts	109 watts	9 watts
Environment	Operating Temperature	-40~75 degrees C						
	Operating Humidity	5% to 95%RH (non-condensing)						
Regulatory	Emissions	FCC Class A, CE						
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)						
Management	Interface	Web, Telnet, SNMPv1/v2c/v3, RMON, SSHv2, TLSv1.2, PLANET CloudViewerPro App, PLANET NMS Central Management						-
	Features	802.1Q VLAN, LLDP, QoS, Bandwidth control, ERPS Ring, LFP, Access Security				802.1Q VLAN, LLDP, QoS, Bandwidth control, ERPS Ring, LFP, Access Security, PD alive check, PoE schedule		-

Industrial PoE Injectors, Splitters, Converters





		802.3at PoE+ Injectors				802.3bt PoE++ Injector		
Model		IPOE-162	IPOE-260/ IPOE-260-12V	IPOE-171-60W	IPOE-171-95W	IPOE-270/ IPOE-270-12V	IPOE-470/ IPOE-470-12V	IPOE-175
Product Image								 IP67
Hardware	RJ45 Data Input Port	1 x RJ45	2 x RJ45	1 x RJ45	1 x RJ45	2 x RJ45	4 x RJ45	1 x RJ45
	RJ45 Data + Power Output Port	1 x RJ45	2 x RJ45	1 x RJ45	1 x RJ45	2 x RJ45	4 x RJ45	1 x RJ45
	Data Rate	10/100/1000Mbps		10/100/1000Mbps		10/100/1000Mbps		10/100/1000Mbps
PoE Spec.	PoE Standard	802.3af/802.3at	802.3at	802.3bt Type-3	802.3bt Type-4	802.3bt Type-4		802.3bt Type-3
	PSE Type	Mid-span	Mid-span	Mid-span and End-span		End-span + Mid-span		
	Power Pin Assignment	4/5(+), 7/8(-)	4/5(+), 7/8(-)	1/2(-), 3/6(+), 4/5(+), 7/8(-)		1/2(-), 3/6(+), 4/5(-), 7/8(+)		
	PoE Port	1	2	1	1	2	4	1
	PoE Power Output	56V DC	48-56V DC/54V DC	52-56V DC	54V DC	48-54V DC/54V DC		55V DC
	PoE Ability	30 watts	60 watts budget	60 watts	95 watts	180 watts budget	240 watts budget	60 watts
Physical	Dimensions (W x D x H)	32 x 87 x 135mm	30 x 70 x 104mm	32 x 87 x 135mm		41 x 70 x 115mm	56 x 87 x 135mm	150 x 72 x 44mm
	Power Supply	External	External	External	External	External	External	External
	Power Requirements	Dual 24-48V DC, 24V AC	Dual 48-56V DC/ Dual 12-56V DC	Dual 48-56V DC	Dual 12-48V DC	Dual 48-54V DC/ Dual 12-54V DC		Dual 24-56V DC
	Operating Temperature	-40-75 degrees C		-40-75 degrees C		-40-75 degrees C		
Regulatory	EMI/Safety		FCC Class A, CE		FCC Class A, CE		FCC Class A, CE	

Industrial PoE Injectors, Splitters, Converters




		802.3at PoE+/802.3bt PoE++ Splitters			
Model		IPOE-162S	IPOE-173S	IPOE-176S	IPOE-175S
Product Image					 IP67
Hardware	Data + Power Input Port	1 x RJ45	1 x RJ45	1 x RJ45	1 x RJ45
	Data Output Port	1 x RJ45	1 x RJ45	1 x RJ45	1 x RJ45
	DC Output Voltage	12V/24V DC, max. 2A	12V/19V/24V, max. 5A	12V/19V/24V, max. 5A	12V DC, max. 5A
	DIP Switch	Adjustable 12V/24V DC	Adjustable 12V/19V/24V	Adjustable 12V/19V/24V	-
	Data Rate	10/100/1000Mbps	10/100/1000Mbps	10/100/1000/2.5G/5G/10G	10/100/1000Mbps
PoE Spec.	PoE Standard	802.3af/802.3at	802.3bt Type-4 PD	802.3bt Type-4 PD	802.3bt Type-3 PD
	PD Type	Both Mid-span and End-span	Both Mid-span and End-span	Mid-span and End-span	Both Mid-span and End-span
	PoE Power Input	52-56V DC	52-56V DC	48-54V DC	52-56V DC
Physical	Dimensions (W x D x H)	32 x 87 x 135mm	32 x 87 x 135mm	32 x 87 x 135mm	150 x 72 x 44mm
	Operating Temperature	-40-75 degrees C		-40-75 degrees C	-40-75 degrees C
Regulatory	EMI/Safety		FCC Class A, CE	FCC Class A, CE	FCC Class A, CE


		PoE Extender			PoE Tester
Model		IPOE-E302	IPOE-E174	WGS-E304PT	POE TESTER+
Product Image					
Hardware	Data + Power Input Port	1 x RJ45 PD	1 x RJ45 PD	1 x RJ45 PD	1 x RJ45
	Data Output Port	2 x RJ45 PSE	4 x RJ45 PSE	4 x RJ45 PSE	-
	DC Output Voltage	PoE 44-57V DC	PoE 44-57V DC	PoE 44-55V DC	-
	DIP Switch	-	-	Standard / VLAN / Extend	-
	Data Rate	10/100/1000Mbps	10/100/1000Mbps	10/100/1000Mbps	10/100/1000Mbps
PoE Spec.	PoE Standard	802.3bt Type-4 PD	802.3bt Type-4 PD	802.3bt Type-4 PD	802.3af/802.3at/802.3bt
	PD Type	Both Mid-span and End-span			
	PoE Power Input	51-56V DC	44-56V DC	50-57 VDC	36-57V DC
Physical	Dimensions (W x D x H)	150 x 72 x 44mm	56 x 87.8 x 135mm	148 x 24.2 x 134 mm	70 x 23 x 22mm
	Operating Temperature	-40-75 degrees C	-40-75 degrees C	-40-75 degrees C	-10-60 degrees C
Regulatory	EMI/Safety		FCC Class A, CE	FCC Class A, CE	CE compliance

Industrial Serial over Ethernet Converters

Industrial Serial over Ethernet Converters									
Model	ICS-2200T		ICS-2400T		ICS-2100T/ICS-2105AT		ICS-2102T/ICS-2102TS		
Product Image									
Serial Port	Interface	2 x RS232/RS422/RS485		4 x RS232/RS422/RS485		1 x RS232/422/485		1 x RS232/422/485	
	Connector	DB9		DB9		1 x DB9 for RS232 1 x 4-pin terminal block for RS422/485			
	Baud Rate (Data Rate)	100bps to 921Kbps		100bps to 921Kbps		50bps to 921Kbps		50bps to 921Kbps	
	Data Bits	5, 6, 7, 8		5, 6, 7, 8		5,6,7,8		5,6,7,8	
	Stop Bits	1, 2		1, 2		1,1.5,2		1,1.5,2	
Flow Control	None, RTS/CTS, Xon/Xoff		None, RTS/CTS, Xon/Xoff		None, RTS/CTS, Xon/Xoff		None, RTS/CTS, Xon/Xoff		
Fast Ethernet Port	Standard	10/100BASE-TX		10/100BASE-TX		ICS-2100/ICS-2100T: 10/100BASE-TX ICS-2105A/ICS-2105AT: 100BASE-FX		100BASE-FX	
	Connector	2 x RJ45		2 x RJ45		ICS-2100T: RJ45 ICS-2105AT: SFP		Duplex SC	
	Optical Wavelength	-		-		ICS-2105AT: Vary on module		1310nm	
	Max. Distance	100m		100m		ICS-2100/ICS-2100T: 100m ICS-2105A/ICS-2105AT: May vary on module		ICS-2102T: 2km ICS-2102TS: 30km	
Power	Protection	Built-in 1.5KV magnetic isolation				6KV ESD		6KV ESD	
	Power Supply	Dual 12~48V DC, 6-pin removable terminal block				Dual 9~48V DC or 24V AC, 6-pin removable terminal block			
Mechanical	Power Consumption	10.1 watts		10.1 watts		5 watts max.		5 watts max.	
	Dimensions (W x D x H)	32 x 87.8 x 135 mm		56 x 87 x 135 mm		32 x 87 x 135 mm		32 x 87 x 135 mm	
	Enclosure	IP30 metal		IP40 metal		IP30 metal		IP30 metal	
Environment	Mounting	DIN-rail, wall-mountable		DIN-rail, wall-mountable		DIN-rail, wall-mountable		DIN-rail, wall-mountable	
	Operating Temperature	-40~75 degrees C		-40~75 degrees C		-40~75 degrees C		-40~75 degrees C	
Regulatory	Operating Humidity	10% to 90%RH (non-condensing)				10% to 90%RH (non-condensing)			
	Emissions	FCC Class A, CE Class A		FCC Class A, CE Class A		FCC, CE		FCC, CE	
Management	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), EC60068-2-6 (Vibration)							
	Interface	Web management, VCOM		Web management, VCOM		IPv4/IPv6 Web, telnet and SNMP management			
Management	Operation Mode	Virtual COM port, TCP server, UDP server, UDP client, pair connection				Virtual COM port, TCP server, UDP server, UDP client, pair connection, RFC2217, Telnet server, Modbus converter			

Industrial Gateways

Industrial Modbus Gateway							
Model	IMG-2100T/IMG-2105AT		IMG-2200T		IMG-2400T		
Product Image							
Serial Port	Interface	1 x RS232/422/485		2 x RS232/422/485		4 x RS232/422/485	
	Connector	1 x DB9 for RS232 1 x 4-pin terminal block for RS422/485		2 x DB9		4 x DB9	
	Baud Rate	50bps to 921Kbps					
	Priority Type	None, Odd, Even, Space, Mark					
	Isolation	-		2KV		2KV	
	Multi-master and Multi-drop	Master mode: 32 TCP slaves Slave mode: 32 TCP masters					
	Operation Mode	Modbus RTU Master/ Modbus RTU Slave/ Modbus ASCII Master/ Modbus ASCII Slave					
LAN Port	Standard	IMG-2100T/IMG-2200T/IMG-2400T: 10/100BASE-TX IMG-2105AT/IMG-2102T/IMG-2102TS: 100BASE-FX					
	Connector	IMG-2100T: RJ45 IMG-2105AT: SFP		2 x RJ45		2 x RJ45	
	Max. Distance	IMG-2100T: 100m IMG-2105AT: May vary on module		100m		100m	
	Protection	6KV ESD		6KV ESD		6KV ESD	
Power	Power Input	Dual DC9-48V or AC 24V		Dual DC 12-48V		Dual DC 12-48V	
	Power Interface	Removable terminal block					
	Power Consumption	5 watts max.		5.4 watts max.		6.5 watts max.	
Mechanical	Dimensions (W x D x H)	32 x 87 x 135 mm		32 x 87 x 135 mm		56 x 87 x 135 mm	
	Enclosure	IP30 metal		IP30 metal		IP40 metal	
Environment	Installation	Wall-mountable, DIN-rail mounting					
	Operating Temperature	-40~75 degrees C		-40~75 degrees C		-40~75 degrees C	
Regulatory	Emissions	FCC, CE		FCC, CE		FCC, CE	
	Stability	IEC60068-2-32 (free fall), IEC60068-2-27 (shock), IEC60068-2-6 (vibration)					
Management	Interface	IPv4 Web, telnet and SNMP management					
	Utility	MBVCOM utility, PLANET Smart Discovery					

Vehicle Cellular Gateway		
Model	VCG-1500WG-LTE	
Product Image		
Hardware	10/100BASE-TX	4
	WAN	1
	Wi-Fi	802.11n, 2.4GHz
	GPS	-
	SIM Card Slot	1
Multi Band Support	TF Card Slot	2
	EU Model	FDD LTE B1/B3/B5/B7/B8/B20 (2100/1800/850/2600/900/800) TDD LTE B38/B40/B41(2600/2300/2500) WCDMA B1/B5/B8(2100/850/900) GSM/EDGE B3/B8 (1800/900)
	US Model	FDD LTE B2/B4/B12 (1900/AWS1700/700) WCDMA B2/B4/B5 (1900/AWS1700/850)
Power	LTE	20MHz bandwidth: 100Mbps (DL), 50Mbps (UL)
	Inputs	6-32V DC
	Connector	Standard 4-pin vehicle power jack
Mechanical	Consumption	3 watts
	Dimensions (W x D x H)	168 x 104 x 25 mm
	Enclosure	IP30 metal
Environment	Mounting	Mounting brackets for vehicles
	Operating Temperature	-25~65 degrees C
Regulatory	Operating Humidity	5~95% (non-condensing)
	Emissions	FCC Part 15 Class A, CE
Management	Stability	Static Route, VPN, DDNS, IP Filter, QoS
	Interface	Console, Web, telnet
	Software Utility	CMS
Management	Log	Syslog Log

Industrial Cellular Gateways

Model	ICG-2515-NR/ICG-2515F-NR	ICG-2515W-NR/ICG-2515FW-NR	ICG-2210W-NR
-------	--------------------------	----------------------------	--------------



Hardware	LAN	4 10/100/1000BASE-T		1 x 10/100 /1000 RJ45 LAN Port
	WAN	1 10/100/1000BASE-T (ICG-2515-NR) 1 1000BASE-X SFP (ICG-2515F-NR)	1 10/100/1000BASE-T (ICG-2515W-NR) 1 1000BASE-X SFP (ICG-2515FW-NR)	1 x 10/100 /1000 RJ45 WAN/LAN Port
	WLAN	-		802.11ac 2.4GHz and 5GHz
	DI & DO	2 DI & 2 DO		-
	GPS	GNSS positioning		-
	COM Port	1*RS485		RS485/RS232
Multi Band Support	5G NR	n1/n2/n3/n5/n7/n8/n12/n20/n25/n28/n38/n40/n41/n48/n66/n71/n77/n78/n79		EU Model • Sub-6: n1, n3, n5, n7, n8, n20, n28, n38, n40, n41, n75, n76, n77, n78, n79 US Model • Sub-6: n2, n5, n7, n12, n14, n25, n30, n48, n41, n70, n66, n71, n77, n78
	4G LTE	B1/B2/B3/B4/B5/B7/B8/B12/B13/B14/B17/B18/ B19/B20/B25/B26/B28/B29/B30/ B32/B46/B66/B71		EU Model • LTE FDD: B1, B3, B5, B7, B8, B20, B28, B32 • LTE TDD: B38, B40, B41, B42, B43 US Model • LTE FDD: B2, B4, B5, B7, B12, B13, B29, B30, B66, B71 • LTE TDD: B41, B46(LAA), B48
	Data Transmission Throughput	Sub-6G: 2.4Gbps (DL) / 500Mbps (UL) LTE: 1Gbps (DL) / 200Mbps (UL)		3.5Gbps (DL)/900Mbps (UL) for NR 1.6Gbps (DL)/200Mbps (UL) for LTE
Power	Inputs	9~54V DC		9-36 VDC (12VDC 1.5A)
	Connector	6 pin terminal block		2pin terminal
	Consumption	6 watts		10 watts 14.4 watts
Mechanical	Dimensions (W x D x H)	50 x 135 x 135 mm		106 x 76 x 23.5 mm
	Enclosure	IP30 metal		IP30
	Mounting	DIN-rail and wall-mountable		Din-rail and wall mount
Environment	Operating Temperature	-40~75 degrees C		-40~75 degrees C
	Operating Humidity	5~90% (non-condensing)		5% to 95%RH (non-condensing)
Regulatory	Emissions	FCC Class A, CE class A		CE
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)		
Management	Interface	Web browser, TLS, SNMP v1,v2c,v3, PLANET Smart Discovery utility, NMS Controller, CloudViewer supported		Web, Telnet, SSHv2, SNMP v1,v2c,v3, PLANET SmartDiscovery
	Features	SD-WAN, Dual WAN, HA, Static Route, DDNS, IP Filter, System Log and Remote Syslog		Static Route, DDNS, IP Filter, System Log and Remote Syslog
	VPN	OpenVPN, IPSec/GRE/L2TP/PPTP VPN		OpenVPN, IPSec/GRE/L2TP/PPTP VPN




Industrial Cellular Gateways

Model	ICG-2510W-LTE	ICG-2510WG-LTE	FWA-2100-NR
-------	---------------	----------------	-------------









Hardware	LAN	5 10/100/1000BASE-T		1 x 10/100 /1000 RJ45 LAN Port, 802.3at PoE+ PD
	WAN	1		-
	WLAN	2.4G/5G		802.11n 2.4GHz
	DI & DO	2 DI & 1 DO		-
	GPS	-		-
	COM Port	1*RS232/RS485		1*RS232/RS485
Multi Band Support	5G NR	-		EU Model • Sub-6: n1, n3, n5, n7, n8, n20, n28, n38, n40, n41, n75, n76, n77, n78, n79 US Model • Sub-6: n2, n5, n7, n12, n14, n25, n30, n48, n41, n70, n66, n71, n77, n78
	4G LTE	EU Model: B1/B3/B5/B7/B8/B20/B38/B40/B41 US Model: B2/B4/B5/B12		EU Model • LTE FDD: B1, B3, B5, B7, B8, B20, B28, B32 • LTE TDD: B38, B40, B41, B42, B43 US Model • LTE FDD: B2, B4, B5, B7, B12, B13, B29, B30, B66, B71 • LTE TDD: B41, B46(LAA), B48
	Data Transmission Throughput	1.4/3/5/10/15/20MHz bandwidth: 150Mbps (DL), 50Mbps (UL)		3.5Gbps (DL)/900Mbps (UL) for NR 1.6Gbps (DL)/200Mbps (UL) for LTE
Power	Inputs	9~36V DC		9-36 VDC (12VDC 1.5A) & 802.3af/at PoE
	Connector	6 pin 3.5mm terminal block		PoE/ DC Adapter
	Consumption	7 watts		18 watts
Mechanical	Dimensions (W x D x H)	115.7 x 133 x 45		150x100x240mm
	Enclosure	IP30 metal		IP68
	Mounting	DIN rail		Wall mount
Environment	Operating Temperature	-35~75degrees		-20~+60°C
	Operating Humidity	5~95% (non-condensing)		5% to 95%RH (non-condensing)
Regulatory	Emissions	FCC Part 15 Class A, CE		CE
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)		
Management	Interface	Console, Web, telnet, SSHv2, SNMPv1,v2c		Web, Telnet, SSHv2, SNMP v1,v2c,v3, PLANET SmartDiscovery, CloudViewerPro App
	Features	Static Route, DDNS, TR069, IP Filter, SMTP		Static Route, DDNS, IP Filter, System Log and Remote Syslog
	VPN	OpenVPN, IPSec/GRE/L2TP/PPTP VPN		OpenVPN, IPSec/GRE/L2TP/PPTP VPN

Industrial Gigabit SFP Modules

Model	MGB-TSX	MGB-TLX	MGB-TSX2	MGB-TL40	MGB-TL80	MFB-TFX	MFB-TF20
Product Image							
PHY Type	1000BASE-SX	1000BASE-LX	1000BASE-SX	1000BASE-LX	1000BASE-LX	100BASE-FX	100BASE-FX
Fiber Type	Multi-mode	Single mode	Multi-mode	Single mode	Single mode	Multi-mode	Single mode
Connector	LC	LC	LC	LC	LC	LC	LC
Wavelength	850nm	1310nm	1310nm	1310nm	1550nm	1310nm	1310nm
Maximum Distance	220m & 550m	20km	2km	40km	80km	2km	20km
Operating Temperature	-40~85 degrees C	-40~85 degrees C	-40~85 degrees C	-40~85 degrees C	-40~85 degrees C	-40~85 degrees C	-40~85 degrees C

Fast Ethernet Transceivers (100BASE-BX, Single Fiber Bi-directional SFP)

Model	MFB-TSA	MFB-TSB	MFB-TFA20	MFB-TFB20	MFB-TFA40	MFB-TFB40
Product Image						
Speed (Mbps)	100	100	100	100	100	100
Connector Interface	WDM (LC)	WDM (LC)	WDM (LC)	WDM (LC)	WDM (LC)	WDM (LC)
Fiber Mode	Multi mode	Multi mode	Single mode	Single mode	Single mode	Single mode
Distance	2km	2km	20km	20km	40km	40km
Wavelength (TX)	1310nm	1550nm	1310nm	1550nm	1310nm	1550nm
Wavelength (RX)	1550nm	1310nm	1550nm	1310nm	1550nm	1310nm
Operating Temp.	-40~85 degrees C	-40~85 degrees C	-40~85 degrees C	-40~85 degrees C	-40~85 degrees C	-40~85 degrees C

Gigabit Ethernet Transceivers (1000BASE-BX, Single Fiber Bi-directional SFP)

Model	MGB-TLA10	MGB-TLB10	MGB-TLA20	MGB-TLB20	MGB-TLA40	MGB-TLB40	MGB-TLA60	MGB-TLB60
Product Image								
Speed (Mbps)	1000	1000	1000	1000	1000	1000	1000	1000
Connector Interface	WDM (LC)	WDM (LC)	WDM (LC)	WDM (LC)	WDM (LC)	WDM (LC)	WDM (LC)	WDM (LC)
Fiber Mode	Single mode		Single mode		Single mode		Single mode	
Distance	10km	10km	20km	20km	40km	40km	60km	60km
Wavelength (TX)	1310nm	1550nm	1310nm	1550nm	1310nm	1550nm	1310nm	1550nm
Wavelength (RX)	1550nm	1310nm	1550nm	1310nm	1550nm	1310nm	1550nm	1310nm
Operating Temp.	-40~85 degrees C		-40~85 degrees C		-40~85 degrees C		-40~85 degrees C	

Model	MGB-2GTSR	MGB-2GTLR2	MGB-2GTLR20	MGB-2GTLA20	MGB-2GTLB20
Product Image					
Speed (Mbps)	2500	2500	2500	2500	2500
Connector Interface	LC	LC	LC	WDM (LC)	WDM (LC)
Fiber Mode	Multi mode	Single mode	Single mode	Single mode	Single mode
Distance	300m	2km	20km	20km	20km
Wavelength (TX)	850nm	1310nm	1310nm	1310nm	1550nm
Wavelength (RX)	850nm	1310nm	1310nm	1550nm	1310nm
Operating Temp.	-40~85 degrees C	-40~85 degrees C	-40~85 degrees C	-40~85 degrees C	-40~85 degrees C

10Gbps SFP+ (10G Ethernet/10GBASE)

	MTB-TSR	MTB-TLR	MTB-TLR20	MTB-TLR40	MTB-TLR60	MTB-TLA20	MTB-TLB20	MTB-TLA40	MTB-TLB40	MTB-TLA60	MTB-TLB60
Product Image											
Speed (Mbps)	10G	10G	10G	10G	10G	10G	10G	10G	10G	10G	10G
Connector Interface	Dual LC/UPC	LC	LC	LC	LC	WDM(LC)	WDM(LC)	WDM(LC)	WDM(LC)	WDM(LC)	WDM(LC)
Fiber Mode	Multi-mode	Single Mode	Single Mode	Single Mode	Single Mode	Single Mode	Single Mode	Single Mode	Single Mode	Single Mode	Single Mode
Distance	300m	10km	20km	40km	60km	20km	20km	40km	40km	60km	60km
Wavelength (nm)	850nm	1310nm	1310nm	1310nm	1550nm	TX:1270nm RX:1330nm	TX:1330nm RX:1270nm	TX:1270nm RX:1330nm	TX:1330nm RX:1270nm	TX:1270nm RX:1330nm	TX:1330nm RX:1270nm
Operating Temp.	-40~85°C	-40~85°C	-40~85°C	-40~85°C	-40~85°C	-40~85°C	-40~85°C	-40~85°C	-40~85°C	-40~85°C	-40~85°C

DIN-rail Power Supplies



	Model	PWR-40-24	PWR-60-24	PWR-75-24	PWR-75-48	PWR-120-48	PWR-240-48	PWR-480-48	PWR-960-48	
Product Image										
Power Output	Budget	40 watts	60 watts	75 watts	75 watts	120 watts	240 watts	480 watts	960 watts	
	DC Voltage	24V, 1.7A	24V, 2.5A	24V, 3.2A	48V, 1.6A	48V, 2.5A	48V, 5A	48V, 10A	48V, 20A	
Power Input	Voltage	100-240V AC, 50/60Hz, 1.1A	100-240V AC, 50/60Hz, 1.8A	100-240V AC, 50/60Hz, 2.0A	100-240V 50/60Hz, 1.45A	100-240V 50/60Hz, 2.25A	100-240V 50/60Hz, 2.5A	100-240V 50/60Hz, 4.8A	200-240V AC, 50/60Hz, 6A	
Mechanical	Dimensions (W x H x D)	40 x 90 x 100 mm		55 x 125 x 100 mm	32 x 125 x 102 mm	65 x 125 x 100 mm	63 x 125 x 113 mm	85.5 x 125.2 x 128.5 mm	110 x 125 x 150mm	
	Weight	0.3kg	0.33kg	0.6kg	0.51kg	0.6kg	1kg	1.5kg	2.47kg	
	Installation	DIN-rail TS-35/7.5 or 15			DIN-rail TS/35/7.5 or 15			DIN-rail TS/35/7.5 or 15		
Environment	Operating Temperature	-20~70 degrees C		-20~70 degrees C			-20~70 degrees C		-30~70 degrees C	
	Storage Temperature	-40~85 degrees C		-40~85 degrees C			-40~85 degrees C		-40~85 degrees C	
	Operating Humidity	20~90%	20~90%	20~90%	20~95%	20~95%	20~95%	20~95%	20~95%	
	Storage Humidity	10~95% (non-condensing)		10~95% (non-condensing)			10~95% (non-condensing)			
Safety & Function	UL508, ul60950-1, TUV EN60950-1 approved, NEC class2/LPS compliant		UL508, UL60950-1, TUV EN6095-1 approved						UL508, UV BS EN/ EN62368-1, BSMI CNS14336-1, AS/ NZS62368.1, EAC TP TC 004 approved (meeting EN60204-1)	

Industrial EtherCAT Slave I/O Modules

EtherCAT Slave							
Model	IECS-1116-DI	IECS-1116-DO	IECJ-300	IECJ-400	IECJ-410FT	IECC-210-KIT	
Product Image							
Hardware	100BASE-E-TX RJ45	2, one IN, one OUT		3, one IN, two OUT	4, one IN, three OUT	3, one IN, two OUT	1 210T: one in 210R: one out
	100BASE-FX SFP	-	-	-	-	1, one out	1 210T: one out 210R: one in
	DI	16 Dry (Source), Wet (Sink/Source)		-	-	-	-
	DO	-	16 Open Collector (Sink), 700mA/Channel	-	-	-	-
Power	Inputs	9V~48VCD	9V~48VCD	9V~48VCD	9V~48VCD	9V~48VCD	9V~48VCD
	Connector	3-pin terminal block		4-pin terminal block	4-pin terminal block	4-pin terminal block	4-pin terminal block
Mechanical	Dimensions (W x D x H)	32 x 87 x 135mm		33 x 70 x 104mm	32 x 87 x 135mm	32 x 87 x 135mm	33 x 70 x 104mm
	Mounting	DIN-rail, wall-mountable		DIN-rail, wall-mountable		DIN-rail, wall-mountable	
Environment	Operating Tempature	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C	-40~75 degrees C
	Operating Humidity	5~95% (non-condensing)		5~95% (non-condensing)		5~95% (non-condensing)	
Protocol	EtherCAT		EtherCAT	EtherCAT	EtherCAT	EtherCAT	EtherCAT



PLANET Technology Corporation

11F., No 96, Minquan Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)

Tel: +886-2-2219-9518

Fax: +886-2-2219-9528

E-mail: sales@planet.com.tw

PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners.

© PLANET Technology Corporation DM-IE0124